

LOC/DME I-ABI 110.3 Chan 40	APP CRS 352°	Rwy Idg TDZE Apt Elev	7198 1776 1791
---	------------------------	-----------------------------	---

ILS or LOC RWY 35R


ABILENE RGNL (ABI)

When local altimeter setting not received, use Dyess altimeter setting and increase all DA 21 feet and all MDA 40 feet. VDP NA when using Dyess altimeter setting. For inoperative MALS/R, increase S-ILS 35R Cat E visibility to RVR 4000 and S-LOC 35R Cat E visibility to 1¾.
 ASR *RVR 1800 authorized with the use of FD or AP or HUD to DA. ADF required.





MISSED APPROACH: Climb to 3300 then climbing right turn to 4000 direct to TOMH I LOM and hold.

ATIS 118.25	ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6
-----------------------	---	-------------------------------------	-------------------------------

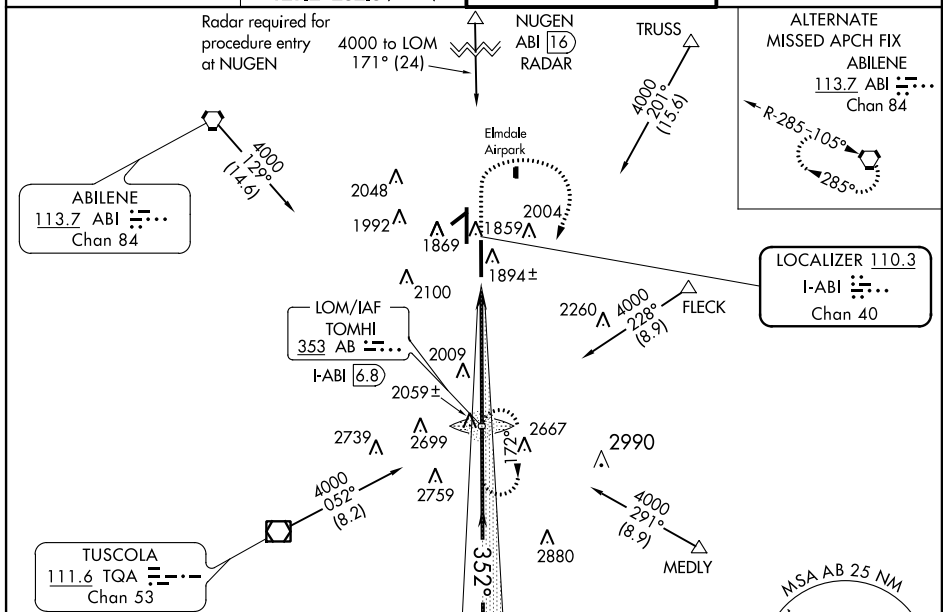

ELEV 1791	D	TDZE 1776
-----------	---	-----------

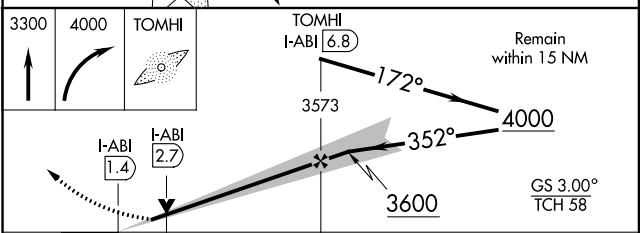

	A	B	C	D	E
S-ILS 35R	*1976/24 200 (200-½)				
S-LOC 35R	2260/24	484 (500-½)	2260/40 484 (500-¾)	2260/50 484 (500-1)	2260/60 484 (500-1½)
CIRCLING	2260-1	469 (500-1)	2360-1½ 569 (600-1½)	2360-2 569 (600-2)	2520-2½ 729 (800-2½)

SC-2, 07 FEB 2013 to 07 MAR 2013

SC-2, 07 FEB 2013 to 07 MAR 2013