

WAAS CH 57919 W13A	APP CRS 129°	Rwy Idg TDZE Apt Elev	7901 3603 3607
--	------------------------	-----------------------------	---


RNAV (GPS) Y RWY 13

AMARILLO/ RICK HUSBAND AMARILLO INTL (AMA)

▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22C (-7F) or above 41C (105F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Baro altimeter setting and increase all DA 153 feet and all MDA 160 feet, increase LPV and LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C and D visibility ½ mile, Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA with Baro altimeter setting.

▲ MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.


ATIS 118.85 350.3	AMARILLO APP CON* 119.5 307.0	AMARILLO TOWER* 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65	UNICOM 122.95
-----------------------------	---	---	-------------------------------	---------------------------	-------------------------

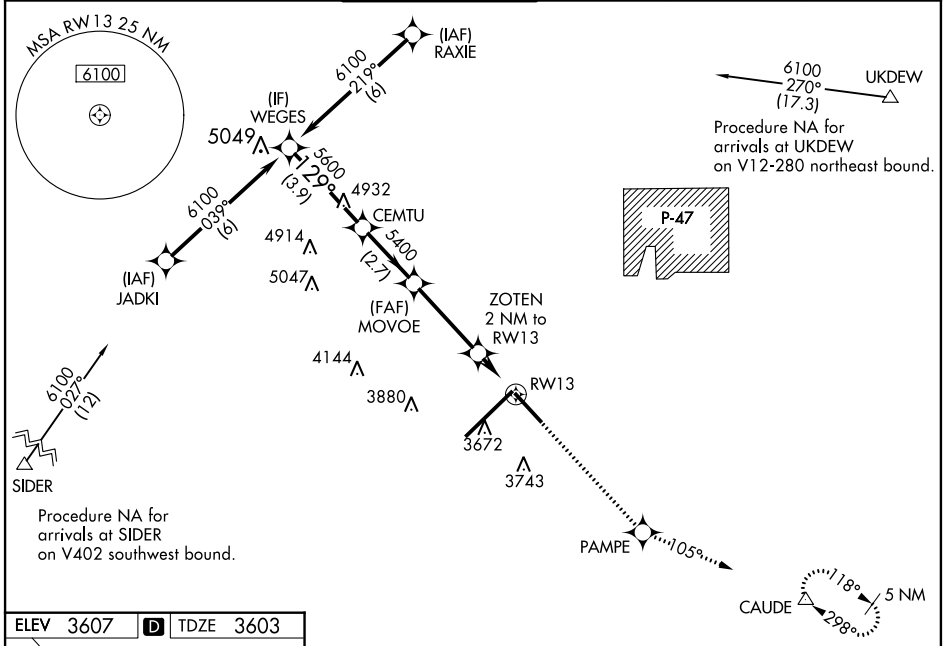

SC-2, 07 FEB 2013 to 07 MAR 2013

SC-2, 07 FEB 2013 to 07 MAR 2013

ELEV 3607	D	TDZE 3603
-----------	----------	-----------

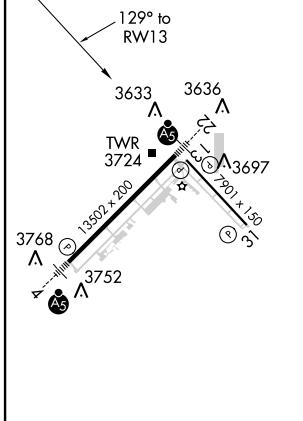

REIL Rwy 13
REIL Rwy 31
HIRL Rwy 4-22 and 13-31

	WEGES	CEMTU	MOVVOE	ZOTEN 2 NM to RW13	*1 NM to RW13	RW13	CAUDE
	6100	5600	5400	*4280			
	Procedure Turn NA						
	GS 3.00°						
	TCH 52						
	3.9 NM	2.7 NM	3.4 NM	1 NM	1 NM		
CATEGORY	A	B	C	D			
LPV DA		3803-¾	200 (200-¾)				
LNAV/VNAV DA		3976-1¼	373 (400-1¼)				
LNAV MDA		3980-1	377 (400-1)			3980-1¼ 377 (400-1¼)	
CIRCLING	4080-1	473 (500-1)	4080-1½ 473 (500-1½)	4240-2 633 (700-2)			