| WAAS CH 93820 W10A | APP CRS 098° | Rwy Idg 5001 | THRE 1591 | Apt Elev 1636 |
|---|---|---|---|---|

# RNAV (GPS) RWY 10

BINGHAMTON/GREATER BINGHAMTON/EDWIN A. LINK FIELD (BGM)

Baro-VNAV NA when using Ithaca altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ithaca altimeter setting and increase all DA 138 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ⅜ mile, LNAV/VNAV all Cats visibility ½ mile and Circling Cats C/D visibility ¼ mile. VDP NA with Ithaca altimeter setting.

MISSED APPROACH: Climb to 4200 direct IPIPE and hold.

| ATIS | BINGHAMTON APP CON ★ | BINGHAMTON TOWER ★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 128.15 | 118.6 257.625 | 119.3 (CTAF) L 239.25 | 121.9 | 125.05 | 122.95 |

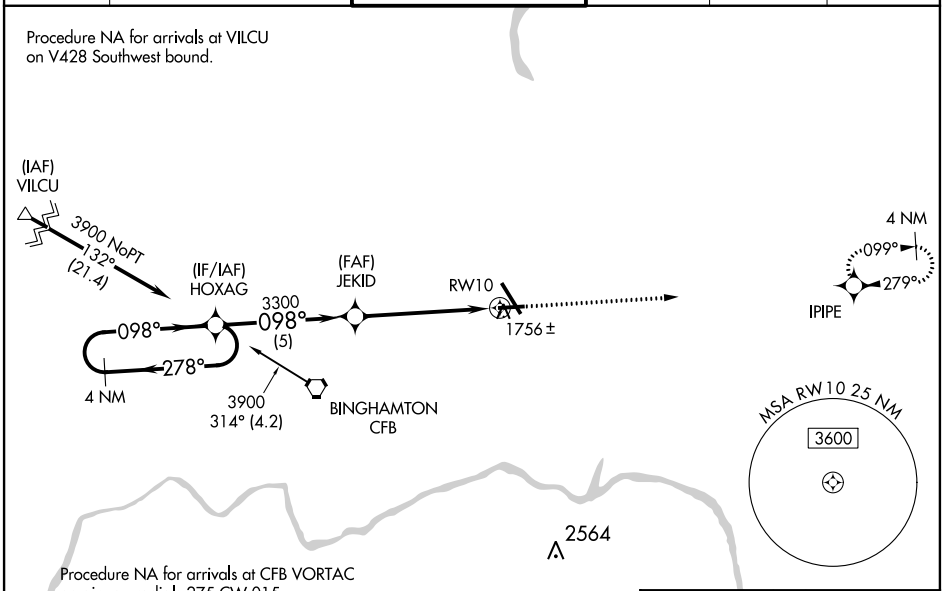


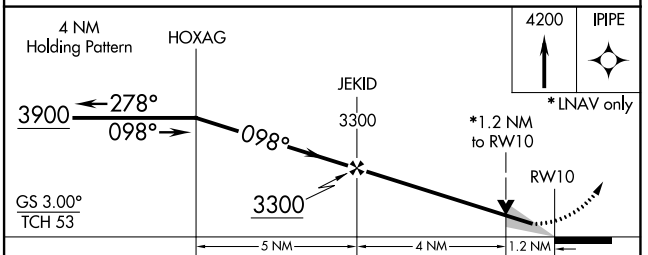


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1791-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 1917-1 326 (300-1) | | | |
| LNAV MDA | 2020-1 429 (400-1) | | 2020-1¼ 429 (400-1¼) | |
| CIRCLING | 2120-1 484 (500-1) | | 2120-1½ 484 (500-1½) | 2200-2 564 (600-2) |

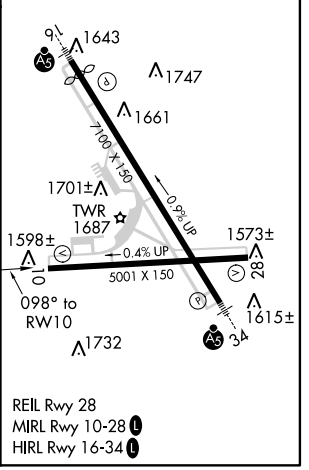




NE-2, 07 FEB 2013 to 07 MAR 2013
NE-2, 07 FEB 2013 to 07 MAR 2013