RNAV (GPS) RWY 31

ARDMORE MUNI (ADM)

WAAS	APP CRS		
CH **69625**	**309°**	Rwy Idg	**9001**
W31A		THRE	**729**
		Apt Elev	**777**

Circling to Rwy 17/35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ardmore Downtown Executive altimeter setting and increase all DA 35 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C and D visibility ⅛ mile, and Circling Cat D visibility ¼ mile. For inoperative MALSR when using Ardmore Downtown Executive altimeter setting, increase LNAV Cats C and D visibility to 1⅜ miles. When VGSI inop, Circling Rwy 13 NA at night.

MALSR

MISSED APPROACH: Climb to 3600 direct RRDEE and hold.

ATIS	FORT WORTH CENTER	ARDMORE TOWER★	GND CON	UNICOM
125.6	**124.75 323.0**	**118.5** (CTAF) L **257.7**	**121.8**	**122.95**

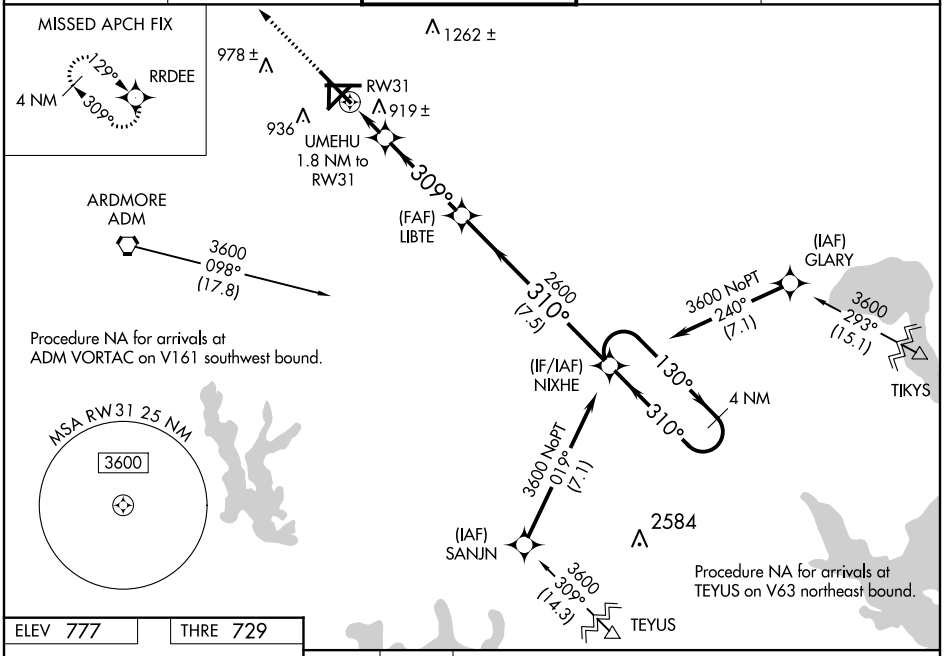

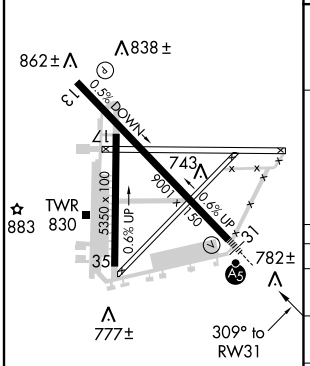

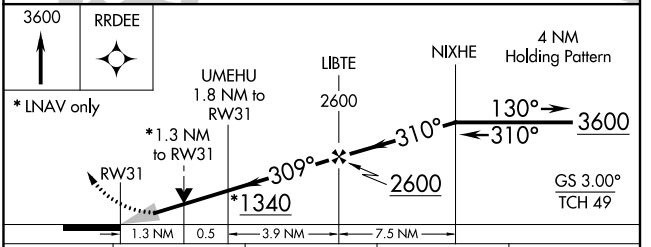

CATEGORY	A	B	C	D
LPV DA	929-½	200 (200-½)		
LNAV/VNAV DA	1237-1¼	508 (500-1¼)		
LNAV MDA	1180-½	451 (500-½)	1180-⅞	451 (500-⅞)
CIRCLING	1380-1	603 (700-1)	1380-1¾ 603 (700-1¾)	1440-2 663 (700-2)

HIRL Rwy 13-31 L
MIRL Rwy 17-35 L

SC-1, 07 FEB 2013 to 07 MAR 2013
SC-1, 07 FEB 2013 to 07 MAR 2013