


# COKEM SIX DEPARTURE (RNAV)

ATIS 125.55  
 CLNC DEL 118.1  
 GND CON  
 121.9 254.4 (Rwys 8L-26R, 8R-26L)  
 121.75 254.4 (Rwys 9L-27R, 9R-27L)  
 121.65 254.4 (Rwy 10-28)  
 ATLANTA TOWER  
 119.1 254.4 (Rwy 8L-26R)  
 125.325 254.4 (Rwy 8R-26L)  
 119.3 254.4 (Rwy 9R-27L)  
 123.85 254.4 (Rwy 9L-27R)  
 119.5 254.4 (Rwy 10-28)  
 ATLANTA DEP CON  
 125.7 284.7 (Rwys 8L-26R, 8R-26L)  
 125.65 284.7 (Rwys 9L-27R, 9R-27L)  
 135.375 284.7 (Rwy 10-28)

NOTE: If unable to accept climb rate, advise ATC on initial contact.  
 NOTE: Use departure frequency depicted unless otherwise assigned.  
 NOTE: For Turbojets only.  
 NOTE: DME/DME/IRU or GPS required.  
 NOTE: RNAV 1.  
 NOTE: Radar required for non-GPS equipped aircraft.  
 NOTE: Accelerate to 250K, if unable, advise ATC.  
 NOTE: Transponder code will be issued via PDC or Atlanta clearance delivery.  
 NOTE: Aircraft at Midfield Ramps will advise Ramp Towers of Departure SID prior to pushback. Upon receipt of ATC clearance (from ATL Clearance Delivery), readback only your call sign and transponder code, unless you have a question.

SE-4, 07 FEB 2013 to 07 MAR 2013

SE-4, 07 FEB 2013 to 07 MAR 2013

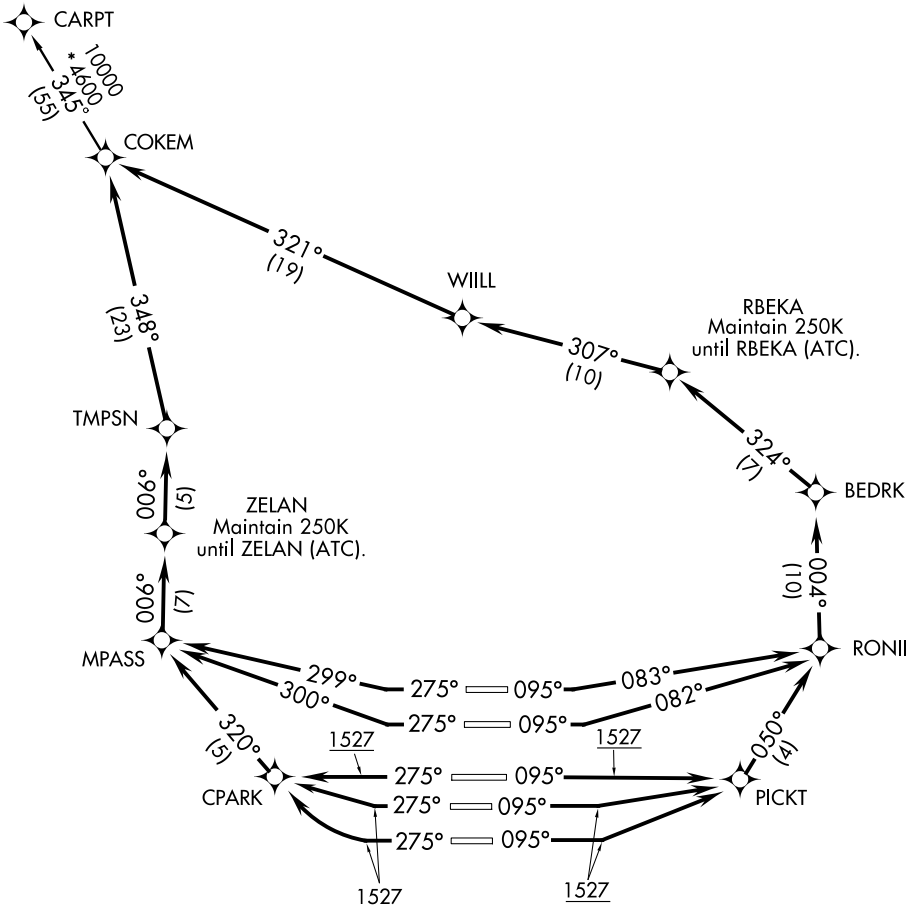

TAKEOFF MINIMUMS:  
 Rwys 8L, 8R, 9L, 9R, 10, 26L, 26R, 27L, 27R, 28:  
 Standard with minimum climb of 500' per NM to 1527.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale