

APP CRS 275°	Rwy Idg 9000
	THRE 998
	Apt Elev 1026

RNAV (RNP) Z RWY 28


ATLANTA/HARTSFIELD-JACKSON ATLANTA INTL (ATL)

⚠ For uncompensated Baro-VNAV systems, procedure NA below -8°C (17°F) or above 54°C (130°F). For inoperative ALSF, increase RNP 0.11 and RNP 0.15 all Cats visibility to RVR 5500, RNP 0.30 all Cats visibility to RVR 6000. RF Required. GPS Required. Simultaneous approach authorized with ILS or LOC Rwy 26L, ILS or LOC Rwy 26R, ILS Rwy 26R (SA Cat II), ILS Rwy 26R (SA Cat II). Use of FD or AP providing RNAV track guidance required during simultaneous operations.



MISSED APPROACH:
Climb to 3000 on track 275° to LYNNN left turn to JOYAL and on track 133° to SCARR and hold.



ATIS ARR 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS				ALL RWYS 121.9	GND CON 10-28 RWYS 121.75 121.65 254.4	ALL RWYS 254.4
DEP 125.55		119.1 125.325 123.85 119.3 119.5 254.4						

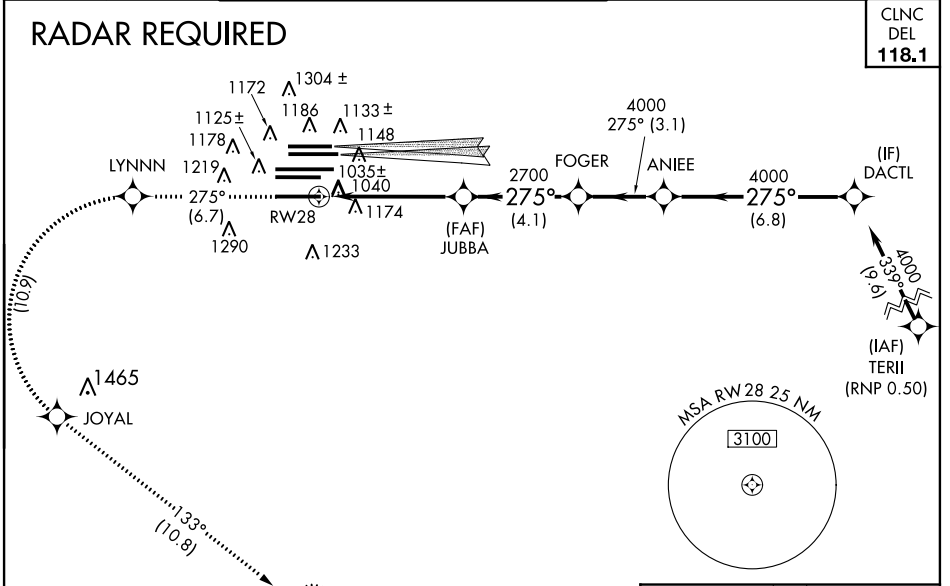

CINC DEL 118.1

SE-4, 07 FEB 2013 to 07 MAR 2013

SE-4, 07 FEB 2013 to 07 MAR 2013

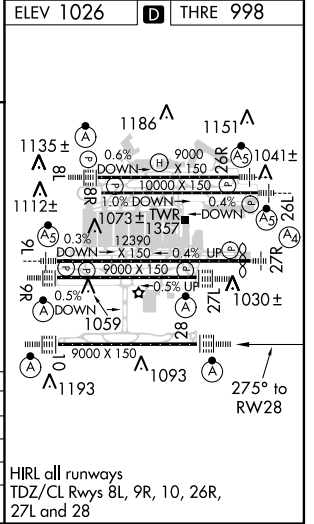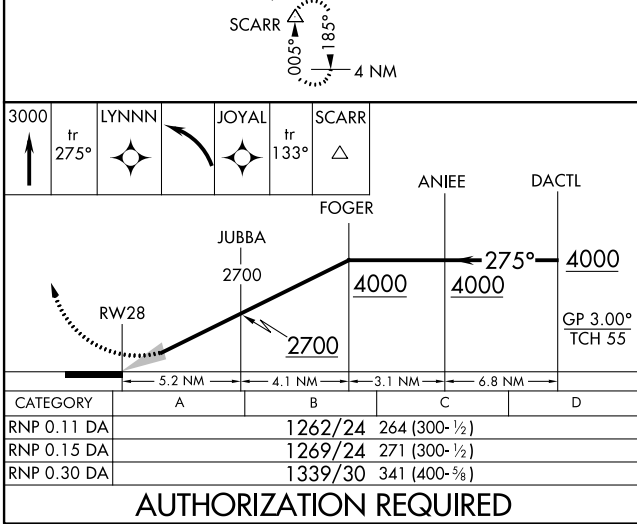

RNAV (RNP) Z RWY 28