WAAS CH 86225 W22A	APP CRS 221°	Rwy Idg 7076 THRE 70 Apt Elev 70

RNAV (GPS) RWY 22R

BATON ROUGE METROPOLITAN, RYAN FIELD (BTR)

Baro-VNAV NA when using Hammond altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Hammond altimeter setting. When local altimeter setting not received, use Hammond altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LNAV/VNAV visibility ¼ mile all Cats and LNAV Cat C/D visibility to RVR 6000, and Circling Cats C visibility ½ mile, and Cat D visibility ¼ mile. For inoperative MALSR when using Hammond altimeter setting, increase LPV all Cats visibility to RVR 4500.

ASR

MALSR

MISSED APPROACH: Climb to 2800 direct IBEKY and hold.

ATIS	BATON ROUGE APP CON ★	RYAN TOWER ★	GND CON	CLNC DEL	UNICOM
125.2	120.3 278.3	118.45 (CTAF) L 257.8	121.9	119.4	122.95

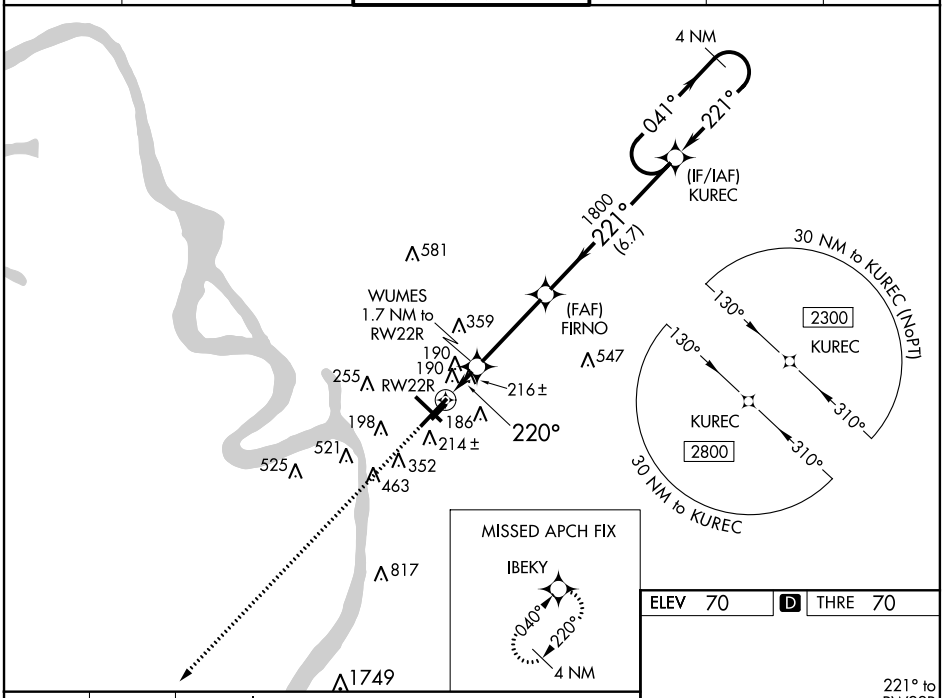

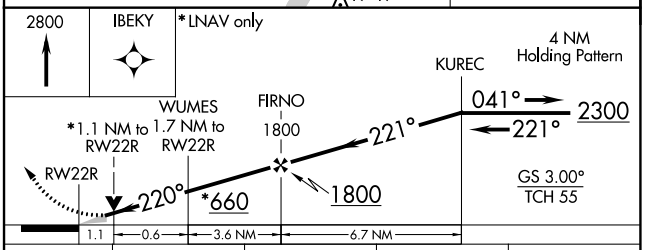

CATEGORY	A	B	C	D
LPV DA	270/24 200 (200-½)			
LNAV/VNAV DA	529/60 459 (500-1¼)			
LNAV MDA	480/24 410 (500-½)		480/40 410 (500-¾)	
CIRCLING	560-1 490 (500-1)		660-1½ 590 (600-1½)	680-2 610 (700-2)

ELEV 70 D THRE 70

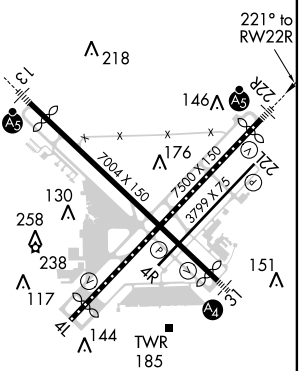

TDZ/CL Rwys 22R
HIRL Rwys 13-31 and 4L-22R L
MIRL Rwy 4R-22L

SC-4, 07 FEB 2013 to 07 MAR 2013
SC-4, 07 FEB 2013 to 07 MAR 2013