


LOC I-BLV 109.9	APP CRS 315°	Rwy Idg THRE Apt Elev 7801 437 459
---------------------------	------------------------	--


ILS or LOC/DME RWY 32L

BELLEVILLE/SCOTT AFB/MIDAMERICA (BLV)



⚠ *RVR 1800 authorized with use of FD or AP or HUD to DA.
⚠ For inoperative MALSR, increase S-ILS 32L Cat E visibility to RVR 4000 and S-LOC 32L Cat C/D/E visibility to 1 1/2 mile. Procedure turn not authorized for Cat E aircraft. DME from SKE TACAN. Simultaneous reception of I-BLV and SKE DME required.

MALSR
 MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 on I-BLV localizer southeast course 135° to TIBLY INT/SKE 14.1 DME and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
------------------------------	--	------------------------------------	-------------------------------	------------------------------------

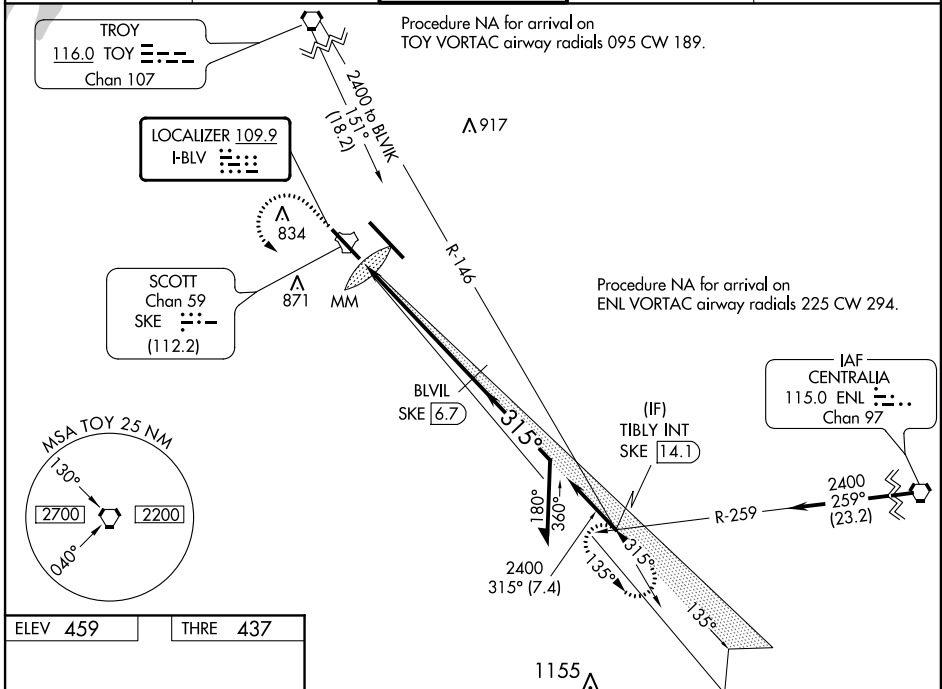

ELEV 459	THRE 437
----------	----------

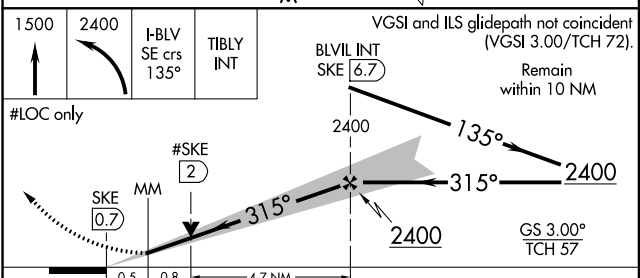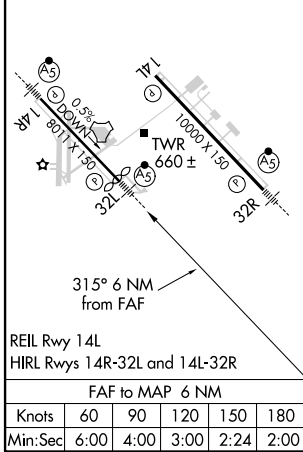

CATEGORY	A	B	C	D	E
S-ILS 32L	* 637/24 200 (200-1/2)				
S-LOC 32L	920/24	483 (500-1/2)	920/50 483 (500-1)		
CIRCLING	1000-1 541 (600-1)	1060-1 601 (700-1)	1060-1 1/4 601 (700-1 1/4)	1240-2 1/2 781 (800-2 1/2)	1240-2 3/4 781 (800-2 3/4)