

WAAS CH 58306 W18A	APP CRS 179°	Rwy ldg 11602 TDZE 250 Apt Elev 254
---------------------------------	------------------------	--

RNAV (GPS) RWY 18

BLYTHEVILLE/ARKANSAS INTL (BYH)



NA Inoperative table does not apply. Circling NA E of Rwy 18-36. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet.

ALSF-1

MISSED APPROACH:
Climb to 2500 direct HABS1 and hold.

MEMPHIS CENTER
134.65 316.15

UNICOM
122.7 (CTAF)

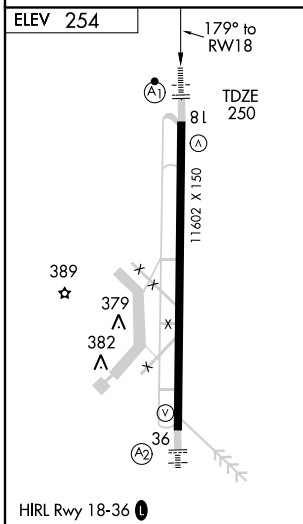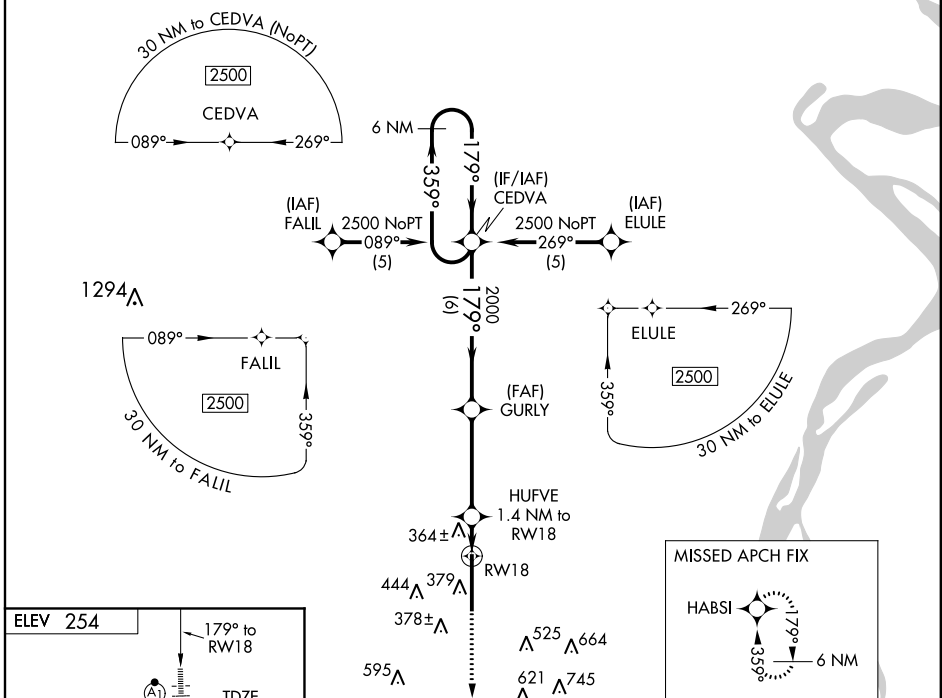

2500	HABS1	6 NM CEDVA Holding Pattern			
*LNAV only		GURLY	2000		
RW18		HUFVE 1.4 NM to RW18	*740		
1.4 NM		3.9 NM	6 NM		
CATEGORY	A	B	C	D	
LPV DA	450-3/4		200 (200-3/4)		
LNAV/VNAV DA	665-1/2		415 (500-1/2)		
LNAV MDA	620-1		370 (400-1)		620-1/4
CIRCLING	700-1	720-1	720-1/2	820-2	
	446 (500-1)	466 (500-1)	466 (500-1/2)	566 (600-2)	

GS 3.00° TCH 54

SC-1, 07 FEB 2013 to 07 MAR 2013

SC-1, 07 FEB 2013 to 07 MAR 2013