WAAS	APP CRS	Rwy Idg	9763
CH 40203	100°	TDZE	2836
W10B		Apt Elev	2871

RNAV (GPS) Y RWY 10R

BOISE AIR TERMINAL (GOWEN FIELD) (BOI)

For inoperative SSALR, increase LNAV Cat. D visibility to RVR 6000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 42°C (107°F).
Circling NA north of Rwys 10L and 28R.
DME/DME RNP- 0.3 NA.

ASLF-2

MISSED APPROACH: Climb to 7200 direct PUKIE and via track 115° to CANEK and hold.

ATIS	BOISE APP CON	BOISE TOWER	GND CON	CLNC DEL
123.9 290.4	119.6 269.4	118.1 257.8	121.7 348.6	125.9 323.2

Procedure NA for arrivals at RENOL via V113 southwest bound, and arrivals at PARMO via V500 northwest bound.

Maximum holding airspeed 230 KIAS.

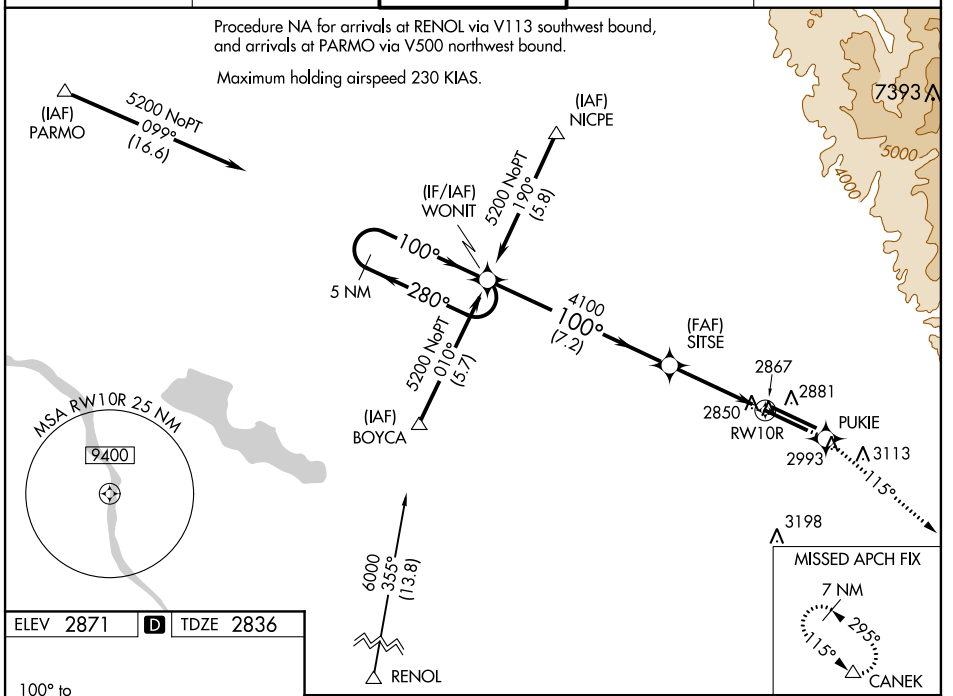

ELEV 2871	D	TDZE 2836



REIL Rwy 10L
TDZ/CL Rwys 10R and 28L
HIRL Rwys 10L-28R and 10R-28L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).

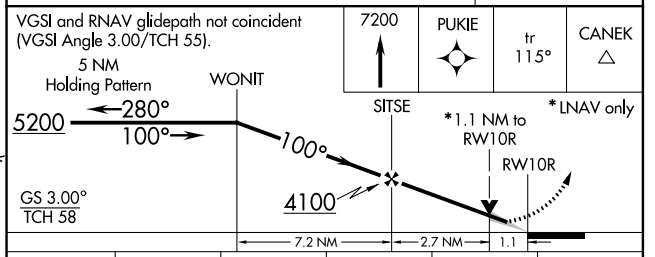

CATEGORY	A	B	C	D	E
LPV DA	3086/24 250 (300-½)				
LNAV/VNAV DA	3189/40 353 (400-¾)				
LNAV MDA	3240/24 404 (400-½)		3240/40 404 (400-¾)	3240/50 404 (400-1)	
CIRCLING	3440-1 569 (600-1)		3440-1½ 569 (600-1½)	3440-2 569 (600-2)	3860-3 989 (1000-3)

NW-1, 07 FEB 2013 to 07 MAR 2013
NW-1, 07 FEB 2013 to 07 MAR 2013