APP CRS	Rwy Idg	5802
076°	THRE	727
	Apt Elev	778

RNAV (RNP) Z RWY 8

BURBANK/BOB HOPE (BUR)

GPS and RF required. For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 47°C (116°F). For inoperative MALSR, increase RNP 0.20 all Cats visibility to 1⅛ miles and RNP 0.30 all Cats visibility to 1½ miles. When VGSI inop, procedure NA at night. Missed approach requires RNP less than 1.0.

MALSR

MISSED APPROACH: Climb to 4000 on track 076° to WOROR, right turn to HAMUS, right turn to ANXAW, right turn to ITATE, and on track 291° to SILEX and hold.

ATIS	SOCAL APP CON	BURBANK TOWER	GND CON	CLNC DEL
134.5	134.2 338.2	118.7 254.3	123.9 348.6	118.0 348.6

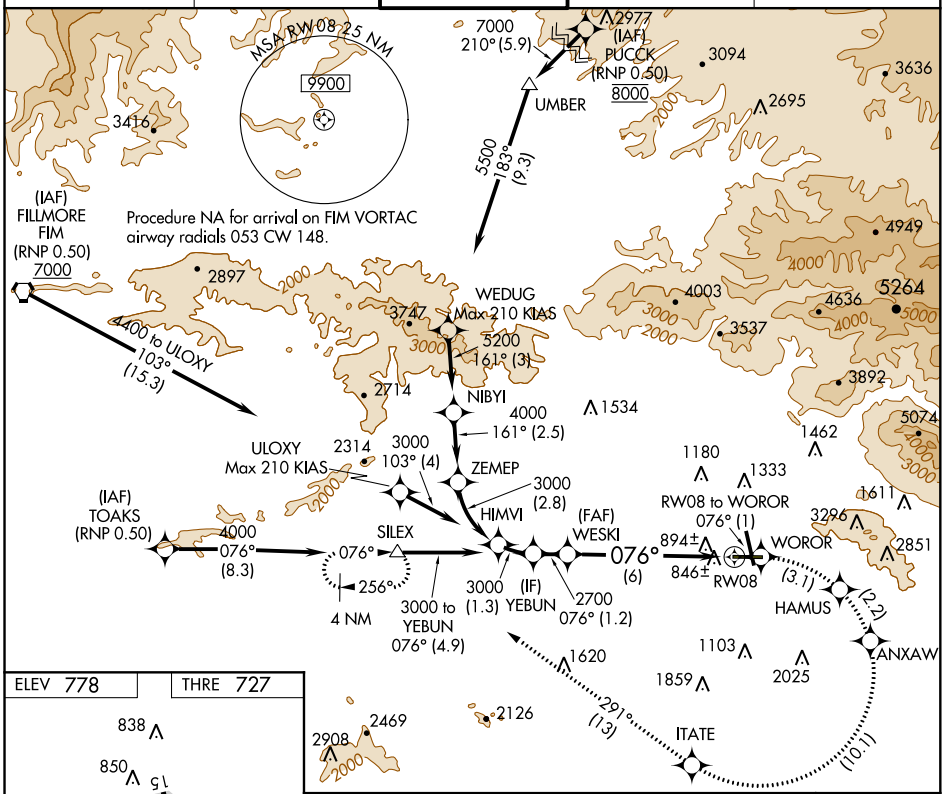

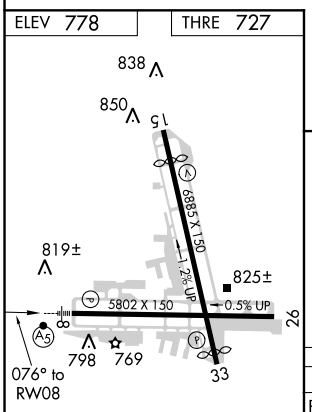

MIRL Rwy 15-33
HIRL Rwy 8-26
REIL Rwys 15, 26 and 33

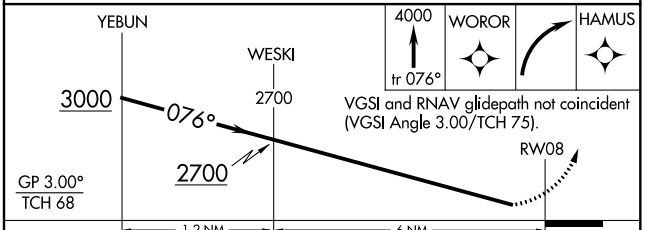

CATEGORY	A	B	C	D
RNP 0.20 DA*		1104/50	377 (400-1)	
RNP 0.30 DA*		1188/50	461 (500-1)	

AUTHORIZATION REQUIRED

SW-3, 07 FEB 2013 to 07 MAR 2013
SW-3, 07 FEB 2013 to 07 MAR 2013