WAAS	APP CRS	Rwy Idg	10201
CH 62911	303°	THRE	1380
W30A		Apt Elev	1382

RNAV (GPS) Y RWY 30C

PHOENIX-MESA GATEWAY (IWA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 35°C (95°F). DME/DME RNP- 0.3 NA. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase all DA and MDA 80 feet, increase LPV all Cats visibility ⅛ mile and LNAV/VNAV all Cats, LNAV Cats C, D, and E, and Circling Cat E ¼ mile. VDP and Baro-VNAV NA with Phoenix Sky Harbor Intl altimeter setting.

MISSED APPROACH: Climb to 2800 then climbing left turn to 5000 direct GICGE and hold.

ATIS	PHOENIX APP CON	GATEWAY TOWER ★	GND CON	CLNC DEL
133.5 270.275	124.9 353.8	120.6 (CTAF) 289.4 (WEST) 124.75 379.225 (EAST)	128.25 275.8	135.05

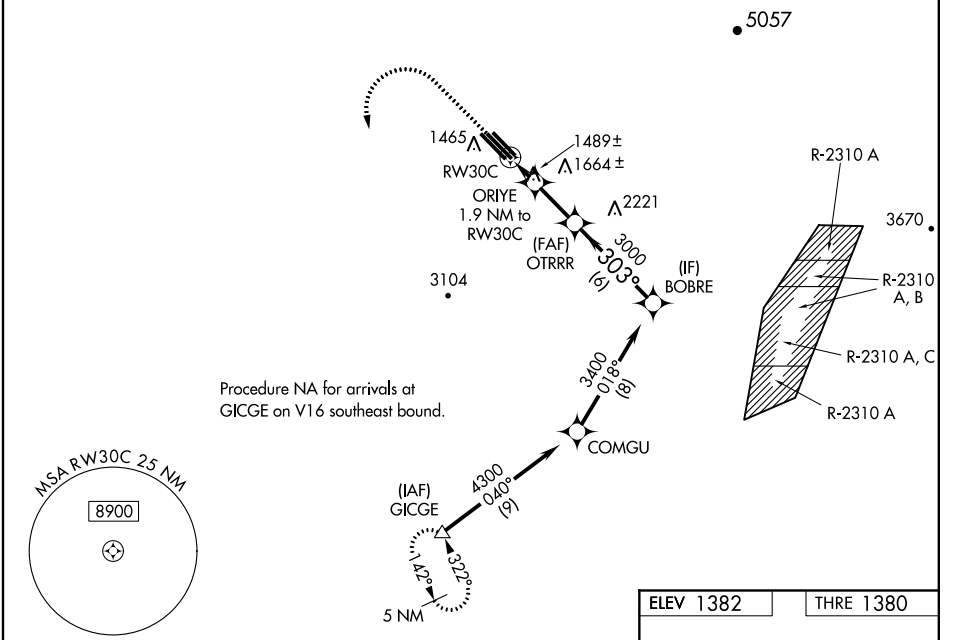

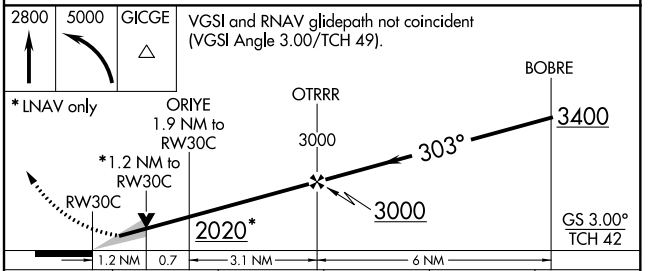

CATEGORY	A	B	C	D	E
LPV DA	1580-¾ 200 (200-¾)				
LNAV/VNAV DA	1630-⅞ 250 (300-⅞)				
LNAV MDA	1800-1 420 (500-1)		1800-1⅛ 420 (500-1⅛)		
CIRCLING	1800-1 418 (500-1)	1840-1 458 (500-1)	1840-1½ 458 (500-1½)	1940-2 558 (600-2)	2040-2¼ 658 (700-2¼)

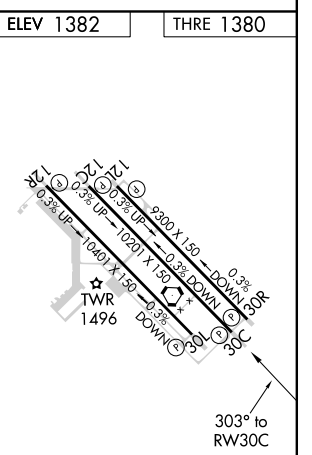

MIRL Rwy 12R-30L
HIRL Rwys 12L-30R and 12C-30C
REIL Rwys 12L and 30R

SW-4, 07 FEB 2013 to 07 MAR 2013
SW-4, 07 FEB 2013 to 07 MAR 2013