

WAAS CH 63218 W33A	APP CRS 334°	Rwy Idg THRE Apt Elev	9001 38 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 33




CHARLESTON AFB/ INTL (CHS)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1½ miles and LNAV Cats C/D visibility to 1¾ miles.

MALSR

MISSED APPROACH:
Climb to 3000 direct
MAMAE and hold.

ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65
-----------------------	--	--	-------------------------------	-----------------------------------

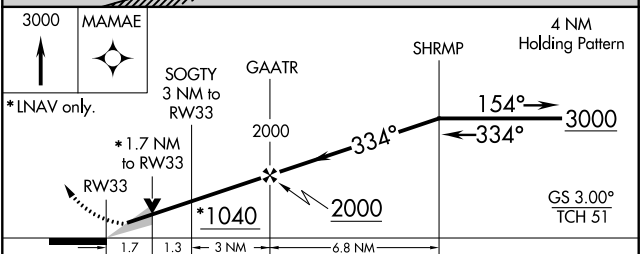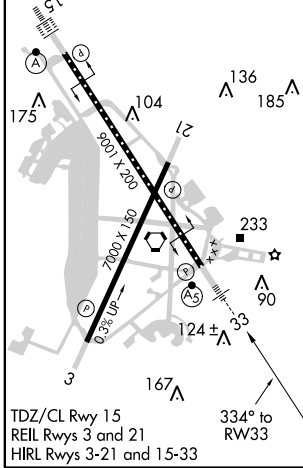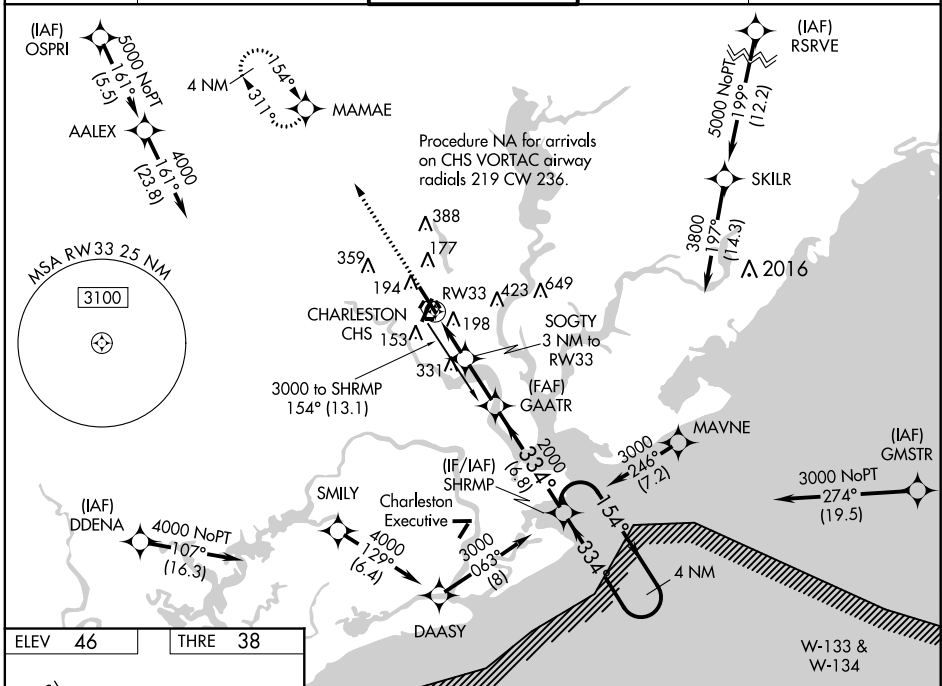

CATEGORY	A	B	C	D
LPV DA		238/24	200 (200½)	
LNAV/VNAV DA		497/60	459 (500-1¼)	
LNAV MDA	640/24	602 (600-½)	640-1⅓	602 (600-1⅓)
CIRCLING	640-1	594 (600-1)	640-1¾ 594 (600-1¾)	640-2 594 (600-2)

SE-2, 07 FEB 2013 to 07 MAR 2013

SE-2, 07 FEB 2013 to 07 MAR 2013