DEBIE SIX DEPARTURE (RNAV)

(DEBIE6.DEBIE) 11349

CHARLOTTE, NORTH CAROLINA

CHARLOTTE/DOUGLAS INTL (CLT)

ATIS DEP
132.1
CLNC DEL
127.15 348.6
GND CON
121.8 348.6 (180° - 359°)
121.9 348.6 (360° - 179°)
CHARLOTTE TOWER
118.1 257.8 (Rwys 18L-36R, 5-23)
126.4 257.8 (Rwy 18C-36C)
133.35 257.8 (Rwy 18R-36L)
CHARLOTTE DEP CON
120.5 257.2

NOTE: For Turbojets Only.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
NOTE: DME/DME/IRU or GPS Required.
NOTE: Radar Required.
NOTE: RNAV 1.
NOTE: Accelerate to 250 KIAS, if unable, advise ATC.
NOTE: Do not exceed 280 KIAS until advised by ATC.

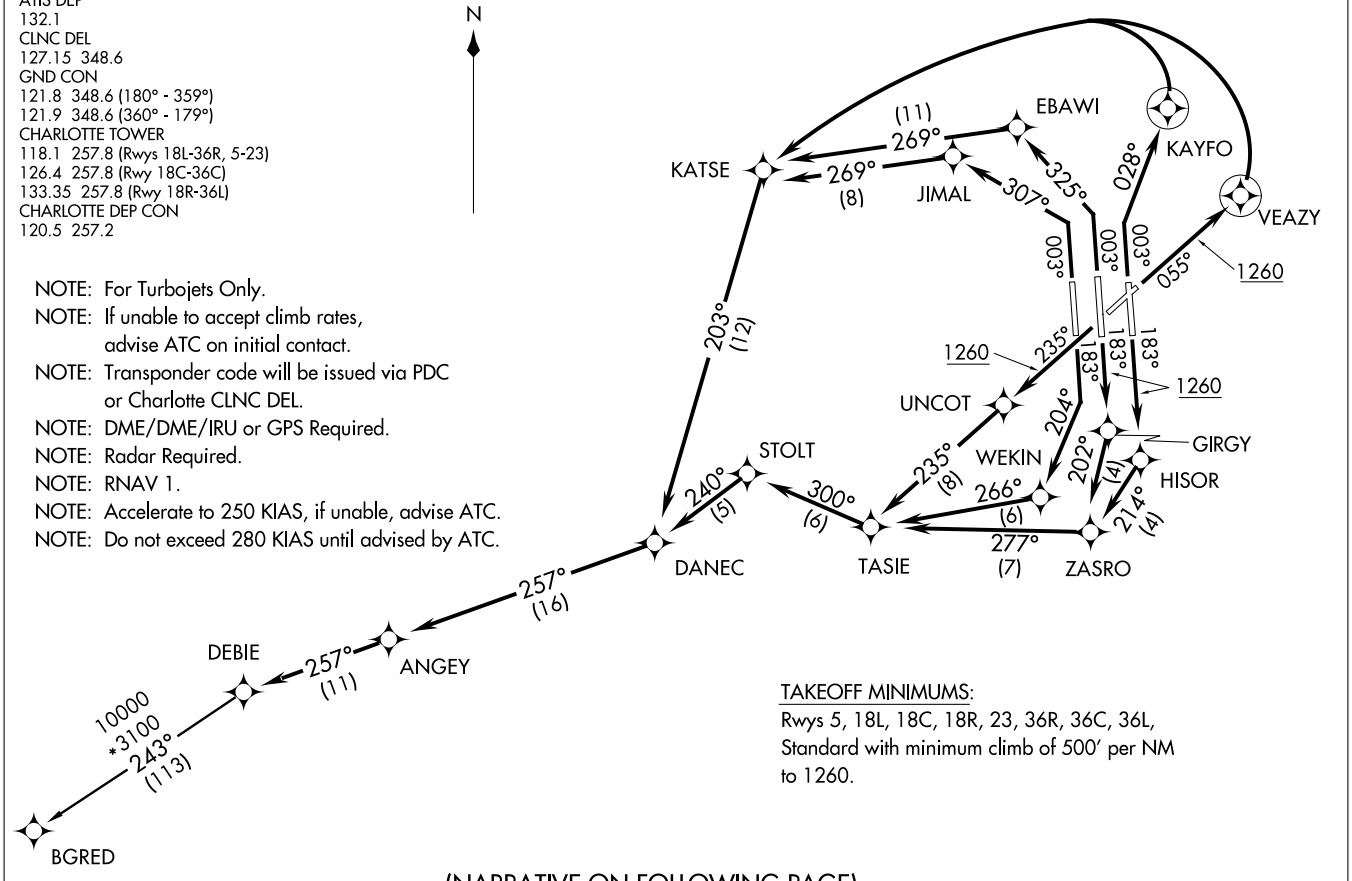

TAKEOFF MINIMUMS:
Rwys 5, 18L, 18C, 18R, 23, 36R, 36C, 36L, Standard with minimum climb of 500′ per NM to 1260.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

(DEBIE6.DEBIE) 11349

DEBIE SIX DEPARTURE (RNAV)

SL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)
CHARLOTTE, NORTH CAROLINA