LOC/DME I-XUU	APP CRS	Rwy Idg	9000
110.15	003°	TDZE	744
Chan 38 (Y)		Apt Elev	748

ILS or LOC RWY 36L
CHARLOTTE/DOUGLAS INTL (CLT)

Circling NA at night. Simultaneous approach authorized with Rwy 36C/R. DME or RADAR Required.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 via heading 280° and CLT R-310 to BUDKE INT/CLT 16 DME and hold.

ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON		CLNC DEL
ARR 121.15	(001°-119°)	128.32	(Rwys 18L-36R, 5-23)	118.1 257.8	(180°-359°)	121.8 348.6	127.15
DEP 132.1	(120°-245°)	120.05	(Rwy 18C-36C)	126.4 257.8	(360°-179°)	121.9 348.6	348.6
	(246°-360°)	134.75	(Rwy 18R-36L)	133.35 257.8			
	(180°-359°)	257.2					
	(360°-179°)	307.8					

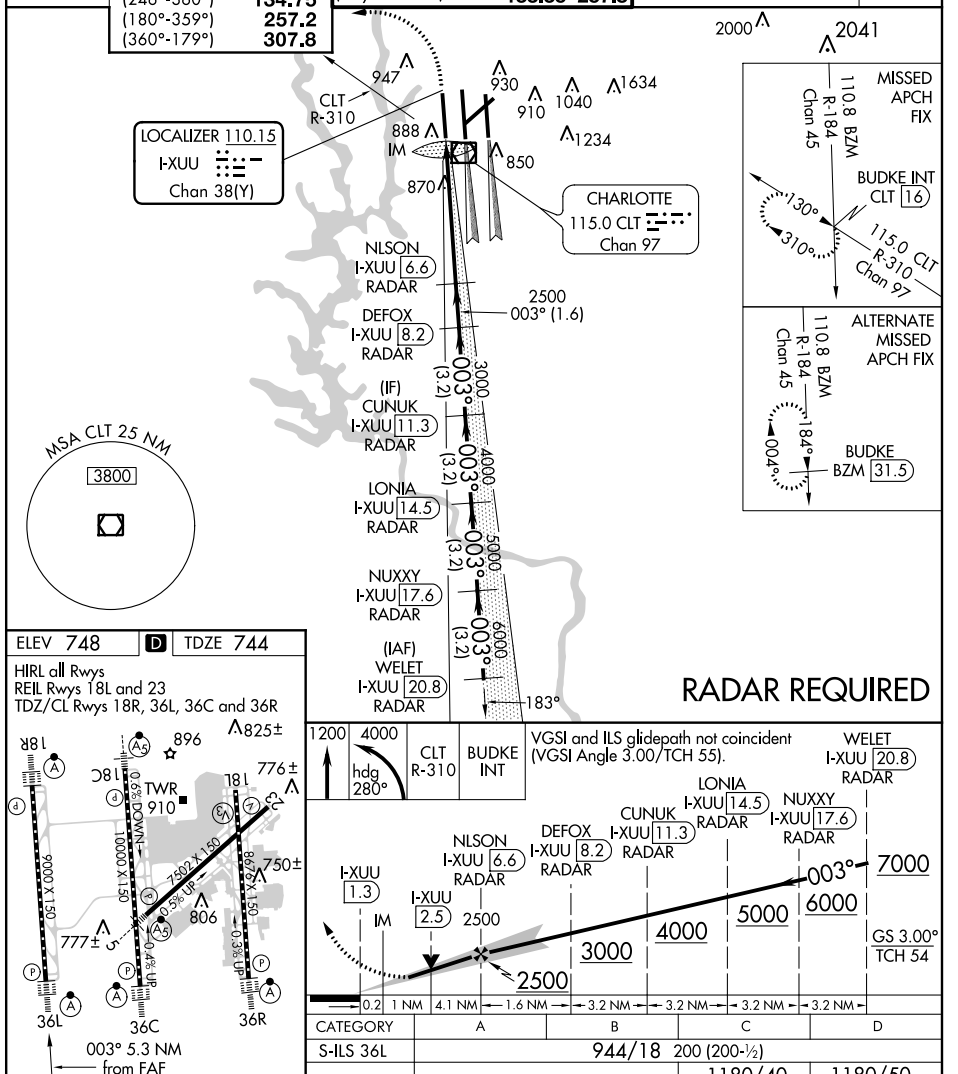

ELEV 748 D TDZE 744

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

003° 5.3 NM from FAF

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

1200 4000 hdg 280° CLT R-310 BUDKE INT

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 55).

CATEGORY	A	B	C	D
S-ILS 36L	944/18 200 (200-½)			
S-LOC 36L	1180/24 436 (500-½)		1180/40 436 (500-¾)	1180/50 436 (500-1)
CIRCLING	1240-1 492 (500-1)		1260-1½ 512 (600-1½)	1300-2 552 (600-2)

SE-2, 07 FEB 2013 to 07 MAR 2013
SE-2, 07 FEB 2013 to 07 MAR 2013