




LOC I-CGW	APP CRS	Rwy Idg TDZE	7200
108.3	019°	682	682
		Apt Elev	682

ILS or LOC RWY 2
CHATTANOOGA/LOVELL FIELD (CHA)

ASR When local altimeter setting not received, use Dalton altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase Circling Cat C/D visibility 1/4 mile. For inoperative MALS/R when using Dalton altimeter setting, increase S-ILS 2 visibility to 1 mile all Cats. Glideslope unusable beyond 4° left of course. Autopilot coupled approaches not authorized below 945 feet MSL. ADF Required. Circling to Rwy 15/33 NA when control tower closed.

MALS/R MISSED APPROACH: Climb to 3200 direct CGN NDB and hold, continue climb-in-hold to 3200.

ATIS	CHATTANOOGA APP CON *	CHATTANOOGA TOWER *	GND CON	CLNC DEL	UNICOM
119.85	125.1 379.1	118.3 (CTAF) 257.8	121.7 348.6	120.95 348.6	122.95

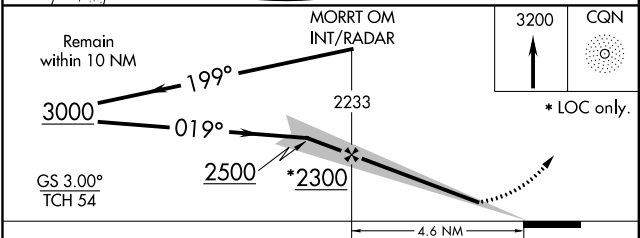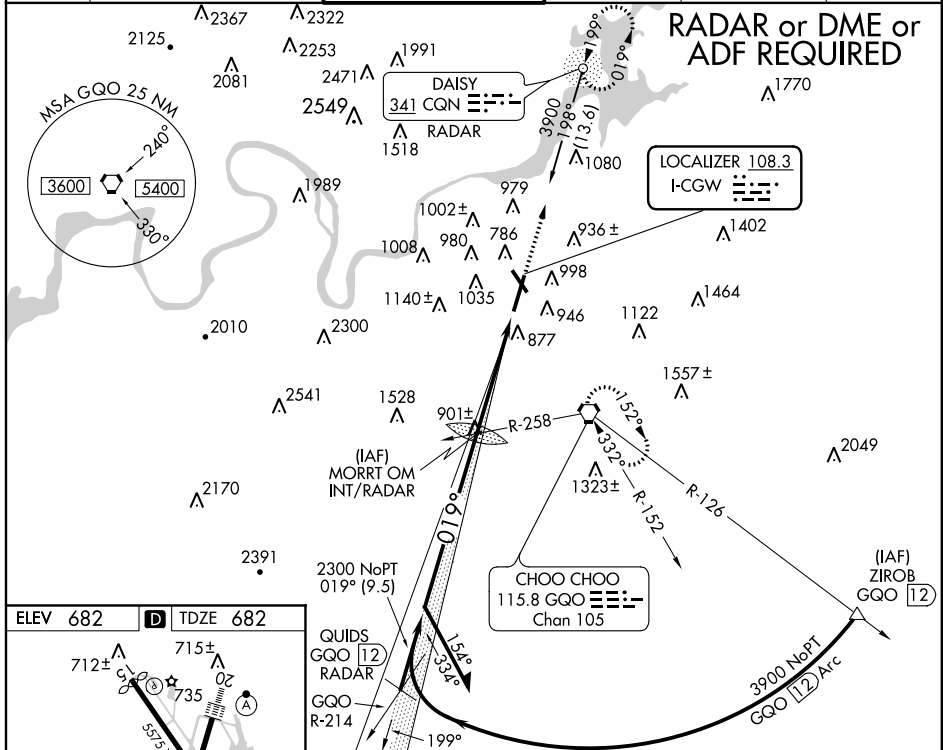

CATEGORY	A	B	C	D
S-ILS 2		882/24	200 (200-1/2)	
S-LOC 2	1200/24	518 (600-1/2)	1200/50 518 (600-1)	1200/60 518 (600-1 1/4)
CIRCLING	1300-1 618 (700-1)	1340-1 658 (700-1)	1340-1 3/4 658 (700-1 3/4)	1460-2 1/2 778 (800-2 1/2)

FAF to MAP	4.6 NM				
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

SE-1, 07 FEB 2013 to 07 MAR 2013

SE-1, 07 FEB 2013 to 07 MAR 2013