

VORTAC GQO 115.8 Chan 105	APP CRS 332°	Rwy Idg TDZE Apt Elev 5000 671 682
---	------------------------	--


VOR RWY 33

CHATTANOOGA/LOVELL FIELD (CHA)

ASR When local altimeter setting not received, use Dalton altimeter setting and increase all MDA 80 feet: increase S-33 visibility Cat B 1/4, Cat C/D 1/2, and Circling visibility Cat C 1/2 and Cat D 1/4 mile. When control tower closed, straight-in minimums NA. ADF Required.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct CGN NDB and hold.

ATIS 119.85	CHATTANOOGA APP CON * 125.1 379.1	CHATTANOOGA TOWER * 118.3 (CTAF) 257.8	GND CON 121.7 348.6	CLNC DEL 120.95 348.6	UNICOM 122.95
-----------------------	---	--	-------------------------------	---------------------------------	-------------------------

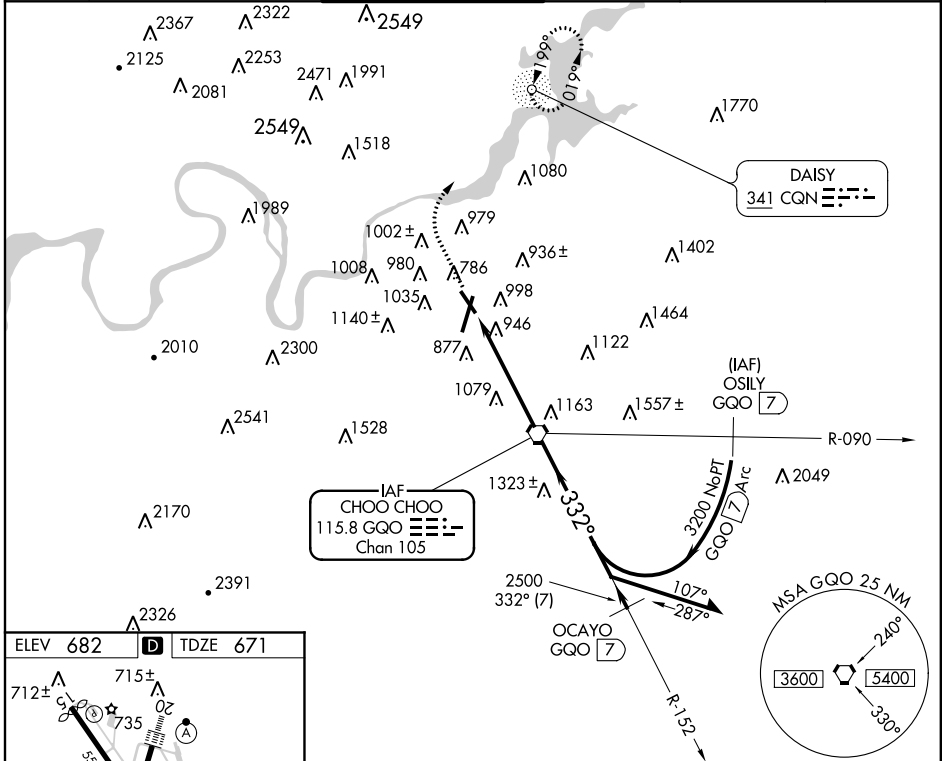

SE-1, 07 FEB 2013 to 07 MAR 2013


SE-1, 07 FEB 2013 to 07 MAR 2013

ELEV 682	TDZE 671
----------	----------

MIRL Rwy 15-33
HIRL Rwy 2-20
TDZ/CL Rwy 20

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

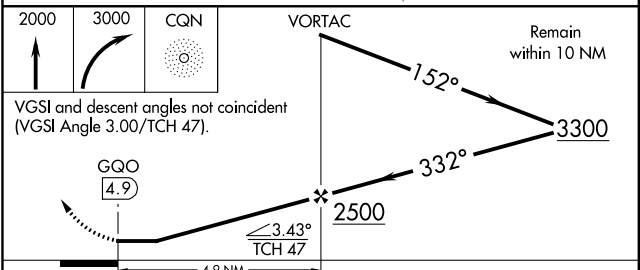

CATEGORY	A	B	C	D
S-33	1340-1	669 (700-1)	1340-1 3/4 669 (700-1 3/4)	1340-2 669 (700-2)
CIRCLING	1340-1	658 (700-1)	1340-1 3/4 658 (700-1 3/4)	1460-2 1/2 778 (800-2 1/2)