RNAV (RNP) Y RWY 13C

CHICAGO MIDWAY INTL (MDW)

APP CRS	Rwy Idg	6059
135°	TDZE	611
	Apt Elev	620

RF, GPS, and RADAR REQUIRED. For uncompensated Baro-VNAV systems, procedure NA below -15° C (5° F) or above 47° C (116° F). When VGSI inop, procedure NA at night.

MISSED APPROACH: Climb to 2600 via 135° track to FATLA and 195° track to EON VORTAC and hold.

ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL
132.75	128.2 388.0	118.7 269.125	121.65	124.625

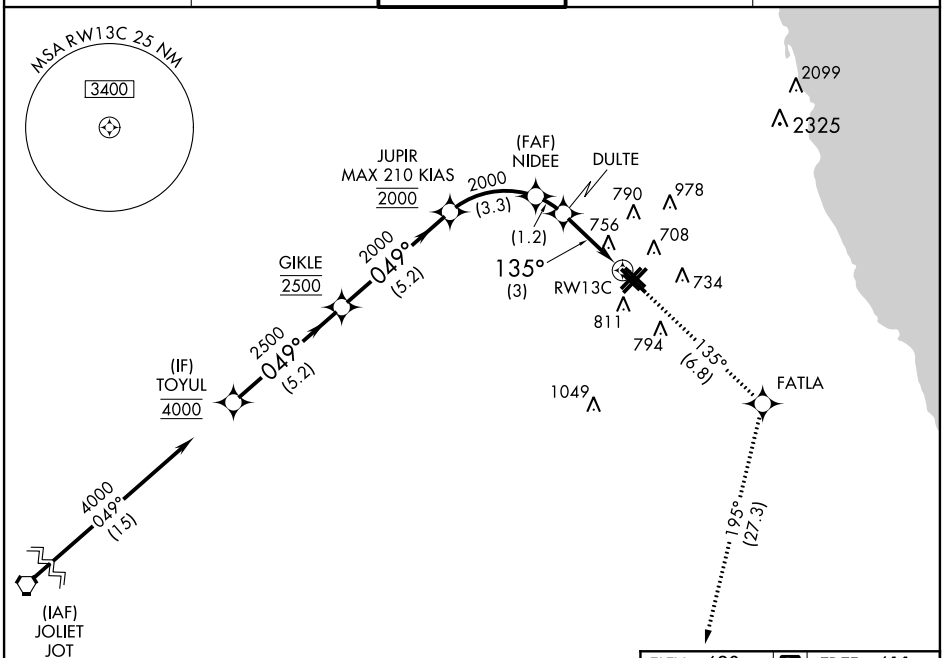

Procedure NA for arrivals at JOT VORTAC via V8 Westbound.



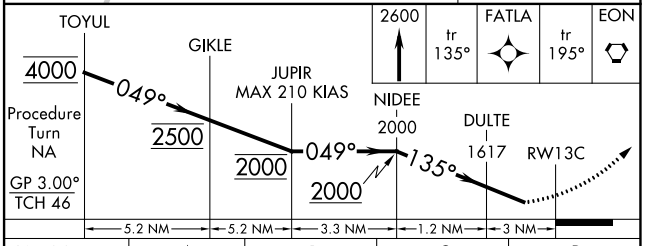

CATEGORY	A	B	C	D
RNP 0.30 DA	1065-1½	454 (500-1½)		

AUTHORIZATION REQUIRED

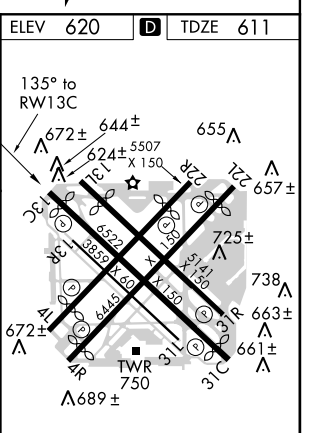

HIRL Rwys 13C-31C and 4R-22L
MIRL Rwys 4L-22R, 13L-31R, and 13R-31L
REIL Rwys 4R, 22L, and 31C
RLLS Rwys 13C and 31C

EC-3, 07 FEB 2013 to 07 MAR 2013
EC-3, 07 FEB 2013 to 07 MAR 2013