

LOC/DME I-CMH 108.7 Chan 24	APP CRS 279°	Rwy Idg 10125 TDZE 813 Apt Elev 815
--	------------------------	--

ILS or LOC RWY 28L


COLUMBUS/PORT COLUMBUS INTL (CMH)

▽ Simultaneous approach authorized with Rwy 28R.
▲ ** RVR 1800 authorized with the use of FD or AP or HUD to DA.

⚡ MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 via heading 210° and APE R-242 to LIMPS Int/34.2 DME and hold.


ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6	CLNC DEL 126.3	UNICOM 122.95
----------------------	---	--------------------------------------	-------------------------------	--------------------------	-------------------------

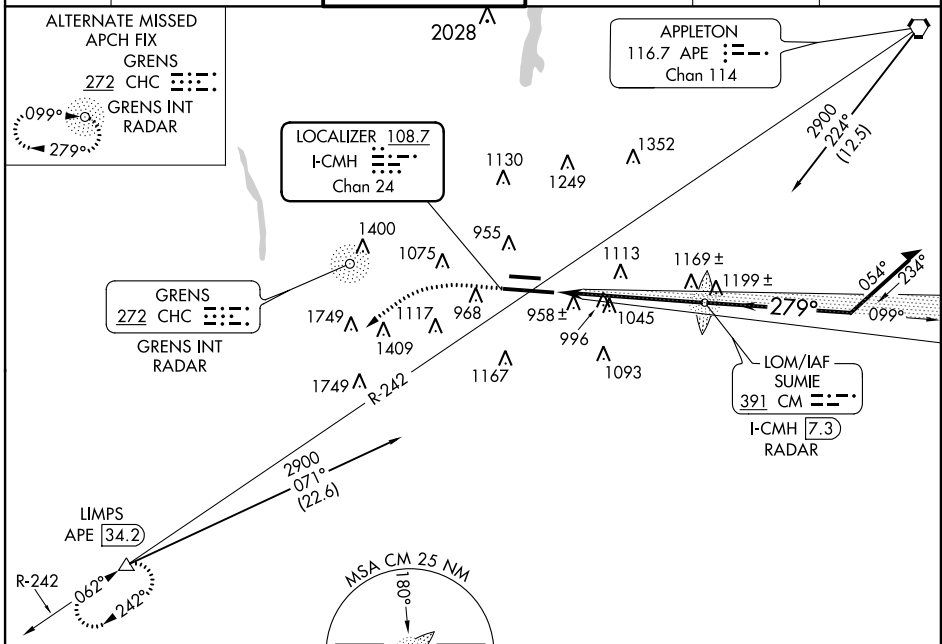


EC-2, 07 FEB 2013 to 07 MAR 2013

EC-2, 07 FEB 2013 to 07 MAR 2013

ELEV 815	D	TDZE 813
----------	----------	----------



ADF or DME REQUIRED
RADAR REQUIRED

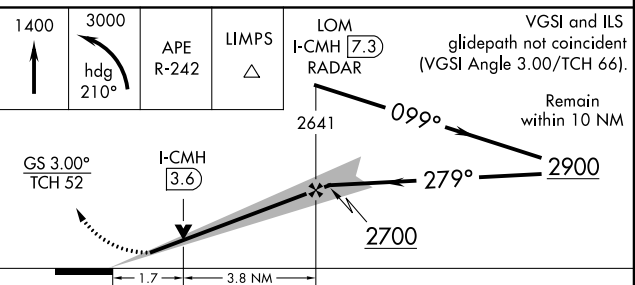

CATEGORY	A	B	C	D
S-ILS 28L	**1013/24 200 (200-½)			
S-LOC 28L	1420/24	607 (700-½)	1420/60 607 (700-1¼)	1420-1½ 607 (700-1½)
CIRCLING	1420-1	605 (700-1)	1420-1¾ 605 (700-1¾)	1420-2 605 (700-2)