

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>40299</b><br><b>W10B</b> | APP CRS<br><b>099°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8000</b><br><b>815</b><br><b>815</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) Y RWY 10L


COLUMBUS/PORT COLUMBUS INTL (CMH)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.



MISSED APPROACH: Climb to 3000 direct CAGTI and hold.



|                      |   |                                      |                               |                          |
|----------------------|---|--------------------------------------|-------------------------------|--------------------------|
| ATIS<br><b>124.6</b> | COLUMBUS APP CON<br><b>125.95 371.975</b> | COLUMBUS TOWER<br><b>132.7 257.8</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>126.3</b> |
|----------------------|---|--------------------------------------|-------------------------------|--------------------------|

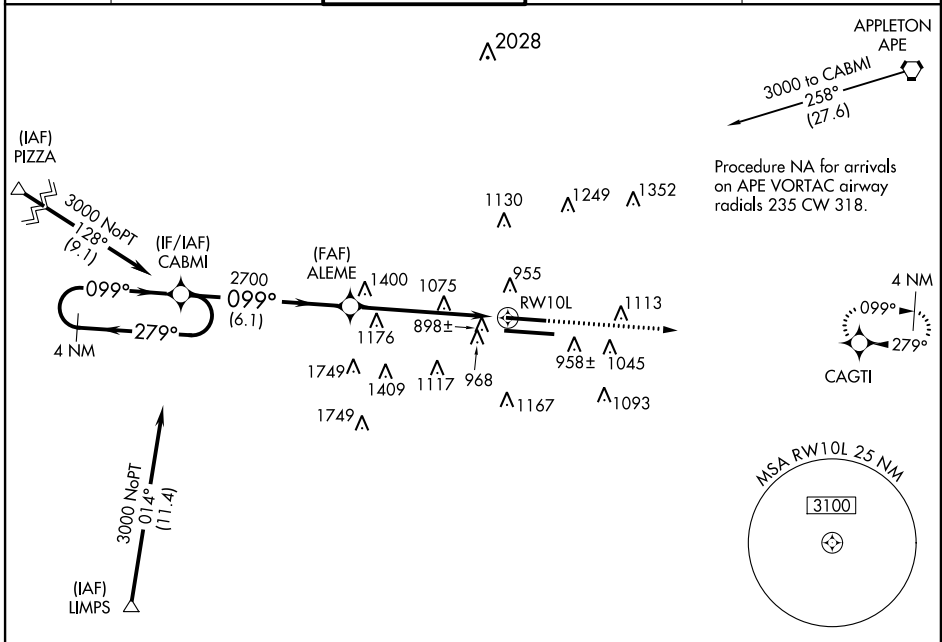

EC-2, 07 FEB 2013 to 07 MAR 2013

EC-2, 07 FEB 2013 to 07 MAR 2013

|          |                   |
|----------|-------------------|
| ELEV 815 | <b>D</b> TDZE 815 |
|----------|-------------------|

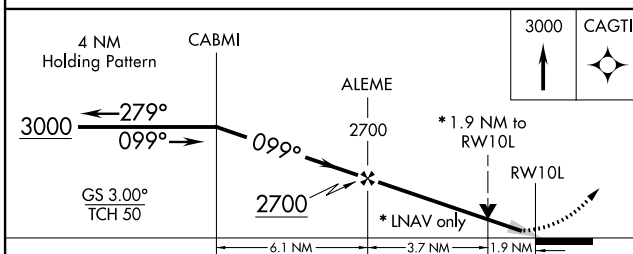

| CATEGORY     | A       | B             | C                             | D                             |
|--------------|---------|---------------|-------------------------------|-------------------------------|
| LPV DA       |         | 1015/24       | 200 (200-1/2)                 |                               |
| LNAV/VNAV DA |         | 1264/50       | 449 (500-1)                   |                               |
| LNAV MDA     | 1480/24 | 665 (700-1/2) | 1480/60<br>665 (700-1 1/4)    | 1480-1 1/2<br>665 (700-1 1/2) |
| CIRCLING     | 1480-1  | 665 (700-1)   | 1480-1 3/4<br>665 (700-1 3/4) | 1480-2<br>665 (700-2)         |