LOC I-AOO	APP CRS	Rwy Idg	5465
111.1	206°	THRE	1469
		Apt Elev	1503

ILS or LOC RWY 21

ALTOONA-BLAIR COUNTY (AOO)

When local altimeter setting not received, use Bedford County altimeter setting and increase all DA 84 feet, and increase S-ILS visibility all Cats ⅜ mile, increase all MDA 100 feet, and increase S-LOC Cat B visibility ¼ mile, Cat C and D visibility ½ mile and Circling Cat B visibility ¼ mile, Cat C visibility ½ mile. For inoperative MALSR when using Bedford County altimeter setting; increase S-ILS visibility all Cats ⅜ mile. For inoperative MALSR increase S-ILS visibility all Cats ½ mile. When Rwy 3 VGSI inop, Circling Rwy 3 NA at night.

MALSR

MISSED APPROACH: Climb to 2500 on AOO R-213 then climbing left turn to 4000 direct AOO VOR and hold.

ASOS	JOHNSTOWN APP CON ★	ALTOONA RADIO	CTAF (L)
127.125	135.975 244.875	123.6	123.6

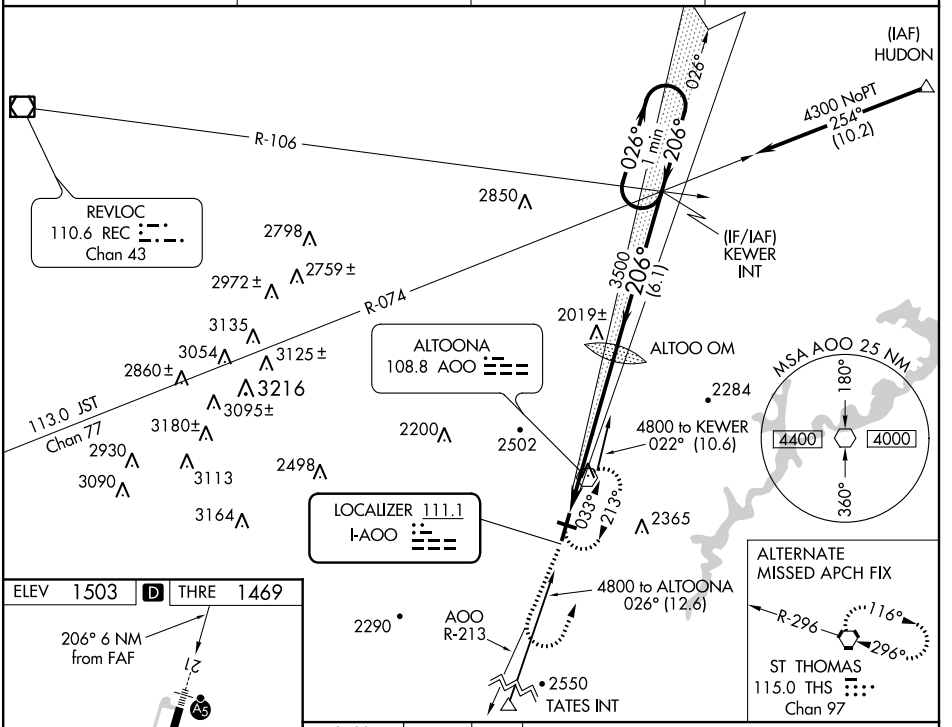

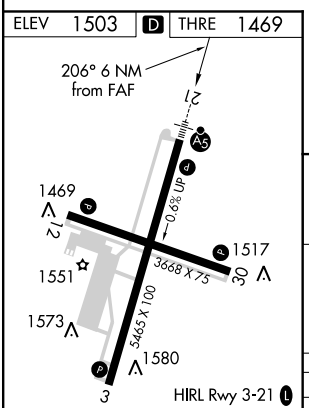

FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

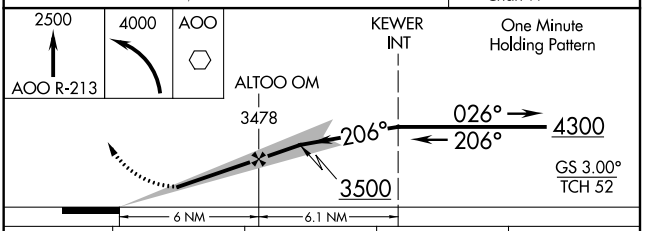

CATEGORY	A	B	C	D
S-ILS 21	1954-1⅛ 485 (500-1⅛)			
S-LOC 21	2360-¾ 891 (900-¾)		2360-2 891 (900-2)	
CIRCLING	2360-1¼ 857 (900-1¼)		2360-2½ 857 (900-2½)	2620-3 1117 (1200-3)

NE-4, 07 FEB 2013 to 07 MAR 2013
NE-4, 07 FEB 2013 to 07 MAR 2013