

LOC I-DRI 111.1	APP CRS 355°	Rwy Idg TDZE Apt Elev	5495 197 202
---------------------------	------------------------	-----------------------------	---

LOC RWY 36




DE RIDDER/ BEAUREGARD RGNL (DRI)

NA Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDA 60 feet, and S-36 visibility Cat C ¼ mile.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT 118.225	POLK APP CON 123.7 261.3	DE RIDDER RADIO 122.2	UNICOM 122.8 (CTAF)
----------------------------	------------------------------------	---------------------------------	-------------------------------

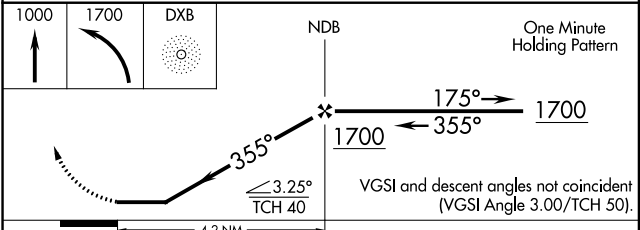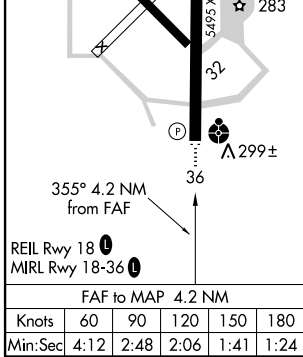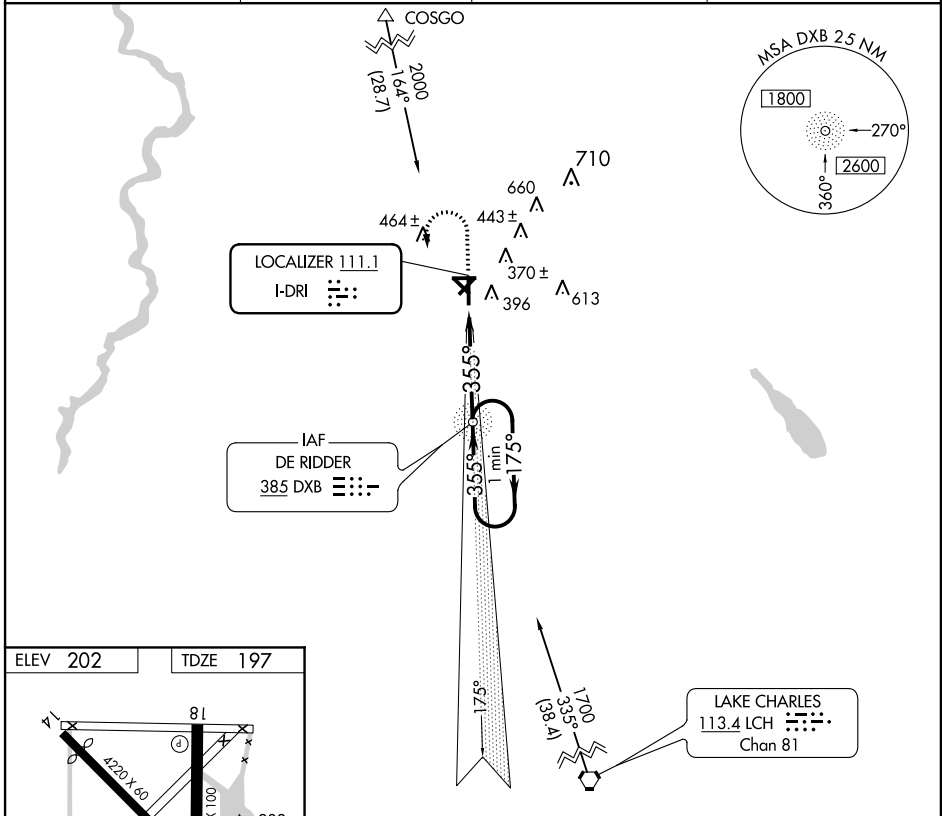

CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		720-1½ 518 (600-1½)	780-2 578 (600-2)

SC-4, 07 FEB 2013 to 07 MAR 2013

SC-4, 07 FEB 2013 to 07 MAR 2013