

WAAS CH 42827 W06A	APP CRS 062°	Rwy Idg THRE Apt Elev	7401 940 955
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6


ELMIRA/CORNING RGNL (ELM)

⚠ Circling to Rwy 10 and 28 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, LNAV/VNAV NA. When local altimeter setting not received, use Penn Yan altimeter setting; increase LPV DA to 1213; increase all MDA 80 feet and LNAV Cats A/C/D visibility ½ mile; inoperative table does not apply to LNAV Cats A/C/D; for inoperative MALSR, increase LPV all Cats visibility to ½.

MALSR



MISSED APPROACH:
Climb to 4200 direct IREKE and hold.

ATIS 125.475	ELMIRA APP CON * 119.45 257.8	ELMIRA TOWER * 121.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
------------------------	---	---	-------------------------	--------------------------	-------------------------

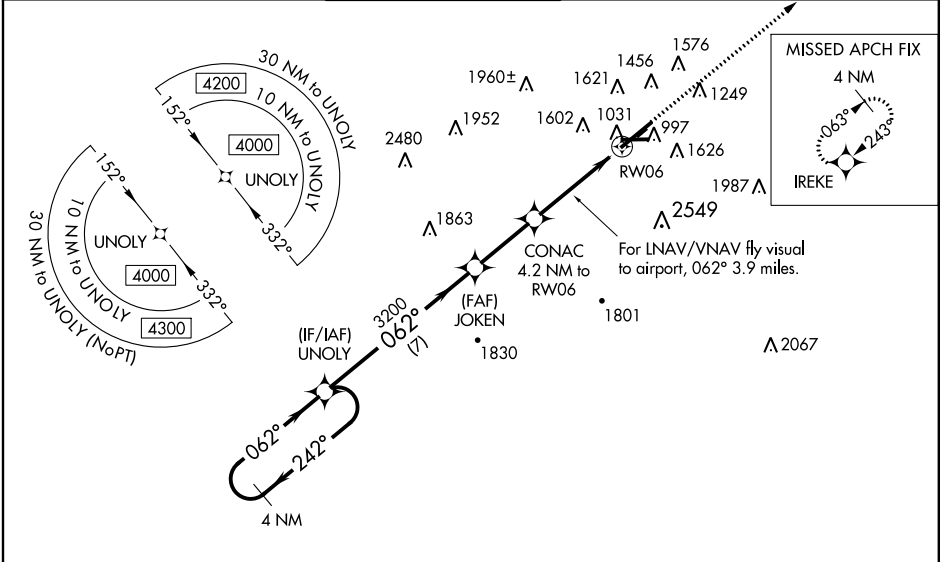

NE-2, 07 FEB 2013 to 07 MAR 2013

NE-2, 07 FEB 2013 to 07 MAR 2013

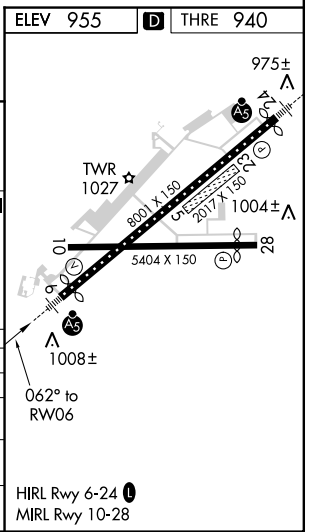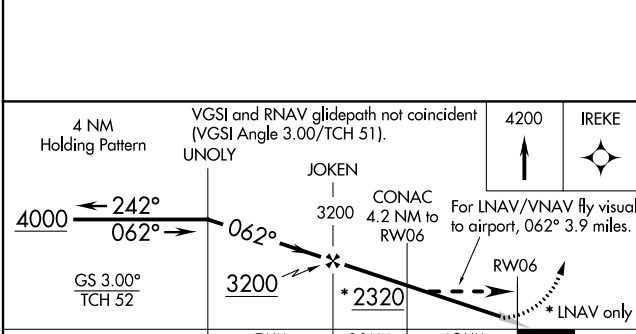

CATEGORY	A	B	C	D
LPV DA		1140-½	200 (200-½)	
LNAV/VNAV DA		2230-3	1290 (1300-3)	
LNAV MDA	2040-¾ 1100 (1100-¾)	2040-1 1100 (1100-1)	2040-2½	1100 (1100-2½)
CIRCLING	2100-1¼ 1145 (1200-1¼)	2100-1½ 1145 (1200-1½)	2120-3 1165 (1200-3)	2160-3 1205 (1300-3)