

RNAV (GPS) RWY 35L

| | |
|-------------------------|--------------------------|
| APCH CRS 355° | Rwy Idg 9217 |
| | THRE 1307 |
| | Arpt Elev 1307 |

AL-135 [USAF]

VANCE AFB (KEND)



▼ * When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1½ miles.
 ** Circling not authorized at night to RWY 35R.



MISSED APPROACH: Climbing left turn to 4300 direct CERPA and hold.

| | | | | |
|-------------------------------|---|--------------------------------------|-------------------------------|--------------------------|
| ATIS ★ 115.4 263.15 | VANCE APP CON E125.45 388.2 W126.75 346.325 | VANCE TOWER ★ 124.05 259.1 | GND CON 121.8 289.4 | CLNC DEL 225.4 |
|-------------------------------|---|--------------------------------------|-------------------------------|--------------------------|



DME/DME RNP-0.3 NA.

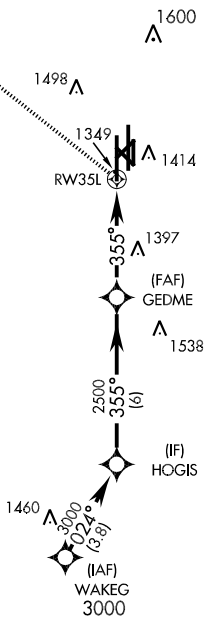

FOR USE BY 71FTW AIRCRAFT ONLY
RADAR REQUIRED

EMERG SAFE ALT 100 NM 4800 FROM RWY35L

| | |
|---------------------------|-----------|
| ELEV 1307 | THRE 1307 |
| HIRL Rwy 17C-35C, 17R-35L | |
| MIRL Rwy 17L-35R | |
| REIL Rwy 17L | |

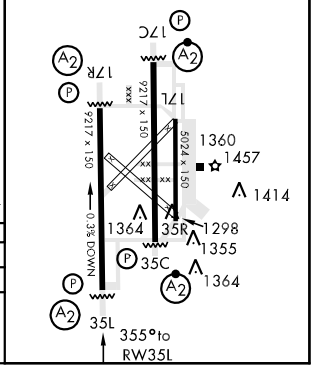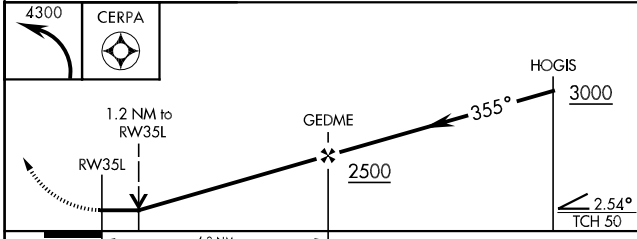

| CATEGORY | A | B | C | D | E |
|-------------|--------------------|----------------------|--------------------|---------------------|---|
| LNNAV MDA * | 1720-¾ 413 (500-¾) | | | | |
| CIRCLING ** | 1760-1 453 (500-1) | 1760-1½ 453 (500-1½) | 1860-2 553 (600-2) | 2300-3 993 (1000-3) | |

RNAV (GPS) RWY 35L

SC-1, 07 FEB 2013 to 07 MAR 2013

SC-1, 07 FEB 2013 to 07 MAR 2013