WAAS	APP CRS	Rwy Idg	9001
CH 40006	176°	TDZE	900
W18A		Apt Elev	902

RNAV (GPS) RWY 18

FARGO/HECTOR INTL (FAR)

For inoperative MALSR, increase LPV Cat E visibility to RVR 4000 and LNAV/VNAV Cat E and LNAV Cat D and E to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

ASR

MALSR

MISSED APPROACH: Climb to 3500 direct KOBME and hold.

ATIS	FARGO APP CON★	FARGO TOWER	GND CON	CLNC DEL
124.5 379.2	120.4 377.15	133.8 290.4	121.9 348.6	121.9 348.6

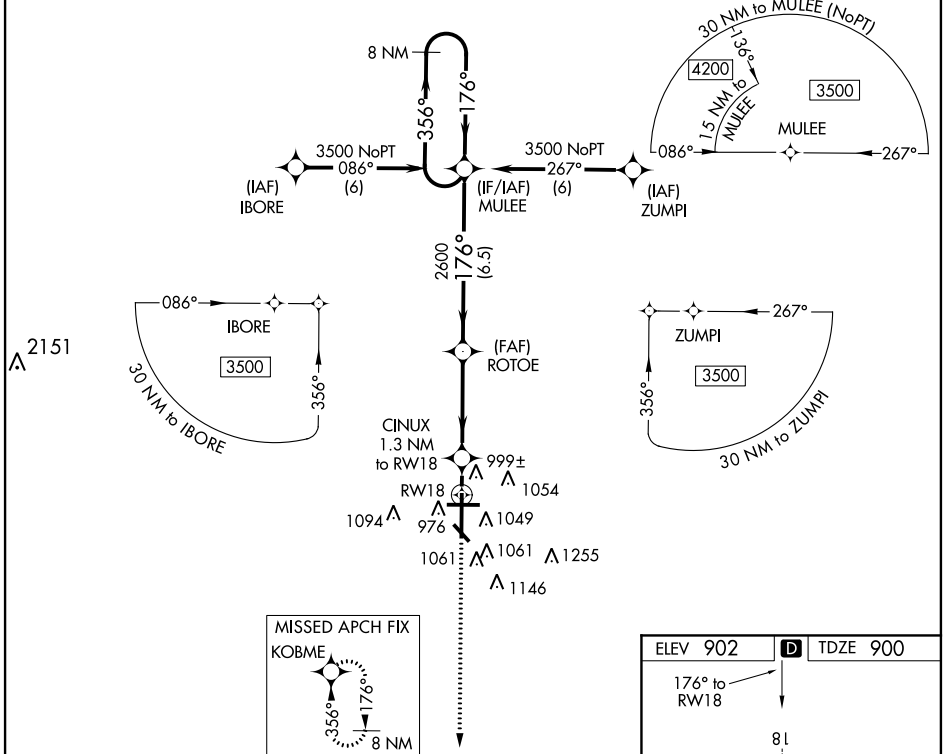

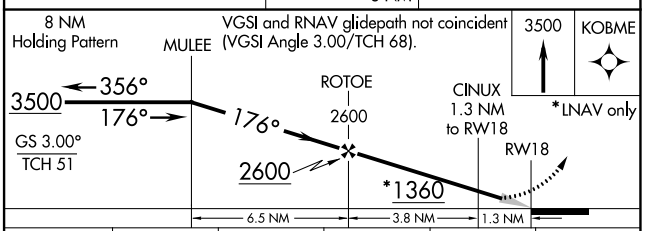

CATEGORY	A	B	C	D	E
LPV DA	1100/24 200 (200-½)				
LNAV/VNAV DA	1272/40 372 (400-¾)				
LNAV MDA	1260/24 360 (400-½)			1260/50 360 (400-1)	
CIRCLING	1380-1 478 (500-1)		1380-1½ 478 (500-1½)	1500-2 598 (600-2)	1560-2¼ 658 (700-2¼)

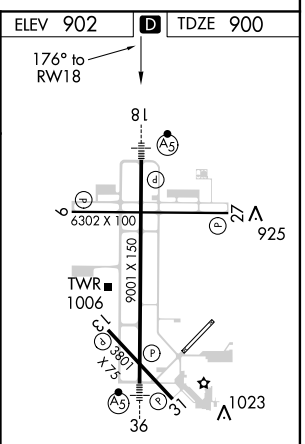

NC-1, 07 FEB 2013 to 07 MAR 2013
NC-1, 07 FEB 2013 to 07 MAR 2013