LOC I-FLO	APP CRS	Rwy Idg	6502
109.1	089°	TDZE	146
		Apt Elev	146

ILS or LOC RWY 9

FLORENCE RGNL (FLO)

DME Required. When local altimeter setting not received, use Darlington altimeter setting and increase all DA/MDA 60 feet, increase S-LOC and Circling Cats. B/C/D visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 via heading 070° and FLO VORTAC R-088 to CARLI/FLO 15.9 DME and hold.

ATIS	FLORENCE APP CON★	FLORENCE TOWER★	GND CON	CLNC DEL	UNICOM
123.625	118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	125.1 (CTAF) L 353.85	121.9 353.85	121.9 353.85	122.95

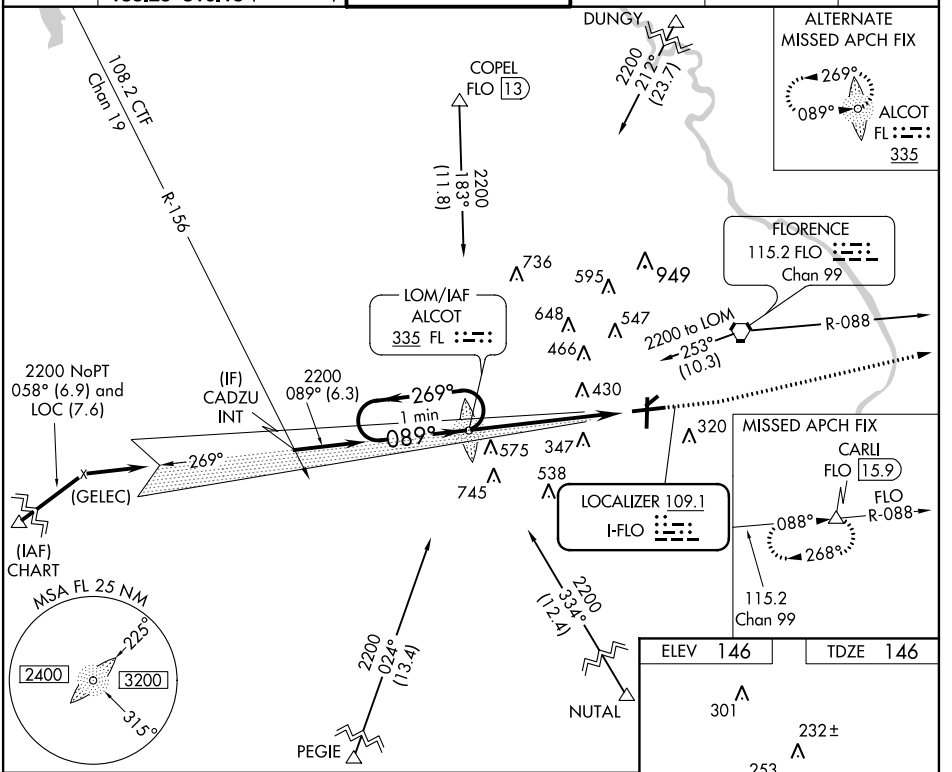

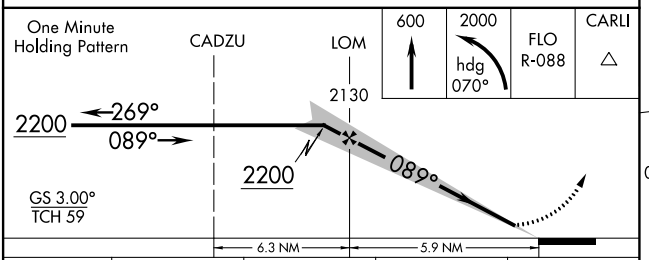

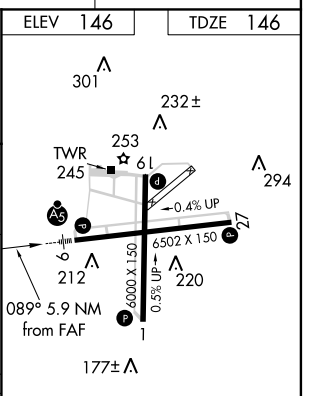

CATEGORY	A	B	C	D
S-ILS 9	346-½ 200 (200-½)			
S-LOC-9	840-½ 694 (700-½)		840-1½ 694 (700-1½)	840-1¾ 694 (700-1¾)
CIRCLING	840-1 694 (700-1)		840-2 694 (700-2)	840-2¼ 694 (700-2¼)

MIRL Rwy 1-19
REIL Rwys 1,19 and 27 L
HIRL Rwy 9-27 L

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

SE-2, 07 FEB 2013 to 07 MAR 2013
SE-2, 07 FEB 2013 to 07 MAR 2013