ASOS
119.275
CLNC DEL
135.35 (when tower closed)
GND CON
118.625
GALVESTON TOWER ★
120.575
HOUSTON DEP CON
134.45 284.0

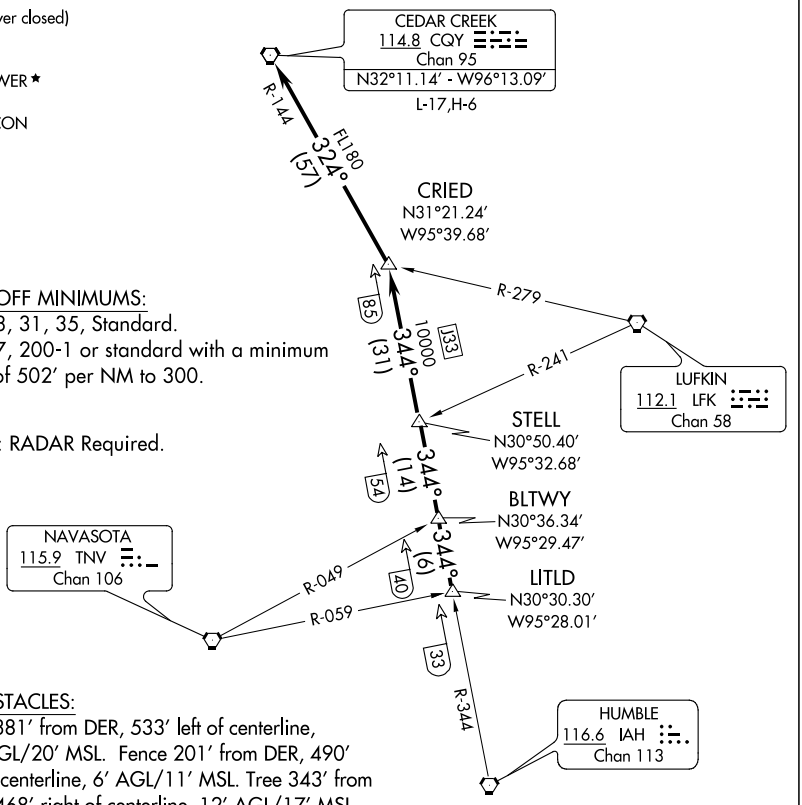

TAKE-OFF MINIMUMS:
Rwy 13, 31, 35, Standard.
Rwy 17, 200-1 or standard with a minimum climb of 502' per NM to 300.

NOTE: RADAR Required.

TAKE-OFF OBSTACLES:
Rwy 13, Bush 381' from DER, 533' left of centerline, 15' AGL/20' MSL. Fence 201' from DER, 490' left of centerline, 6' AGL/11' MSL. Tree 343' from DER, 468' right of centerline, 12' AGL/17' MSL.
Rwy 17, Building 3057' from DER, 339' left of centerline, 123' AGL/130' MSL. Multiple poles beginning 2034' from DER, 87' right of centerline, up to 60' AGL/70' MSL. Multiple transmission towers beginning 636' from DER, 551' right of centerline, up to 55' AGL/60' MSL. Tree 460' from DER, 316' right of centerline, 22' AGL/29' MSL.
Rwy 31, Multiple cranes beginning 4341' from DER, 1017' left of centerline, up to 131' AGL/131' MSL.
Rwy 35, Tree 730' from DER, 501' right of centerline, 27' AGL/32' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

When entering controlled airspace, climb on assigned heading for radar vectors to LITLD INT, maintain 4000. Expect filed altitude 10 minutes after departure. Thence . . . .

. . . . via IAH R-344 to STELL INT, then via IAH R-344 to CRIED INT, then left turn via CQY R-144 to CQY VORTAC.

SC-5, 07 FEB 2013 to 07 MAR 2013
SC-5, 07 FEB 2013 to 07 MAR 2013