CMSKY ONE DEPARTURE (RNAV)

ATIS
135.4 282.225
GND CON
121.75 (Outbound)
124.125 (TWR NORTH)
226.675
O'HARE TOWERS
128.15 (RWY 9L/27R)
120.75 126.9 (CENTER)
132.7 348.0 (CENTER)
CHICAGO DEP CON SOUTH
126.625 269.5

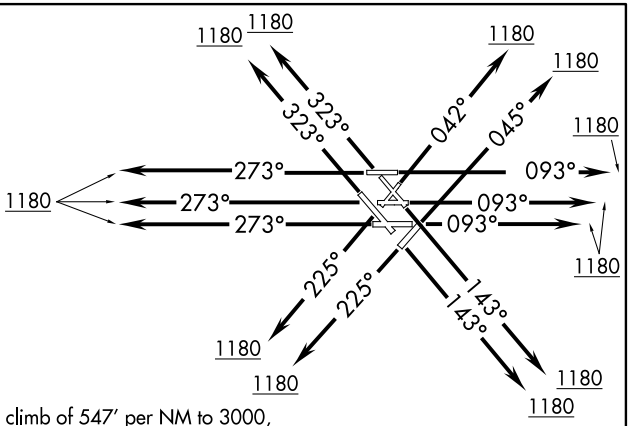

TAKEOFF MINIMUMS:

Rwy 4L: Standard with minimum climb of 547′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 4R: Standard with minimum climb of 690′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 9L Standard with minimum climb of 570′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 9R: Standard with minimum climb of 541′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy10: Standard with minimum climb of 672′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy14L Standard with minimum climb of 547′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 14R: Standard with minimum climb of 670′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 22L: Standard with minimum climb of 807′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy: 22R: Standard with minimum climb of 521′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 27L: Standard with minimum climb of 532′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 27R: Standard with minimum climb of 631′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 28: Standard with minimum climb of 685′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 32L: Standard with minimum climb of 631′ per NM to 3000, then minimum climb of 350′ per NM to 4000.
Rwy 32R Standard with minimum climb of 587′ per NM to 3000, then minimum climb of 350′ per NM to 4000.

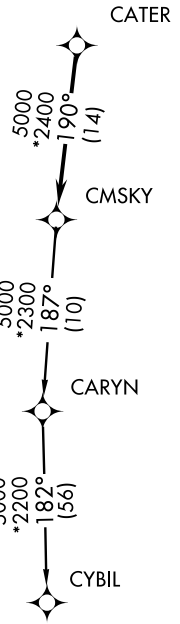

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

EC-3, 07 FEB 2013 to 07 MAR 2013
EC-3, 07 FEB 2013 to 07 MAR 2013