ILS or LOC RWY 28

CHICAGO-O'HARE INTL (ORD)

LOC/DME I-TSL	APP CRS	Rwy Idg / TDZE / Apt Elev
111.1 Chan 48	273°	13001 / 651 / 672

Simultaneous approach authorized with Rwy 27L/R. DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 via heading 215° and DPA VOR/DME R-082 to DPA VOR/DME and hold.

ATIS	CHICAGO APP CON	O'HARE TOWERS	(TWR NORTH) GND CON (TWR CENTER)	CLNC DEL
135.4 282.225	119.0 393.1	128.15 (Rwy 9L/27R) 120.75 126.9 132.7 348.0 (CENTER)	124.125 121.75 (OBND) 121.9 (IBND) 226.675	121.6

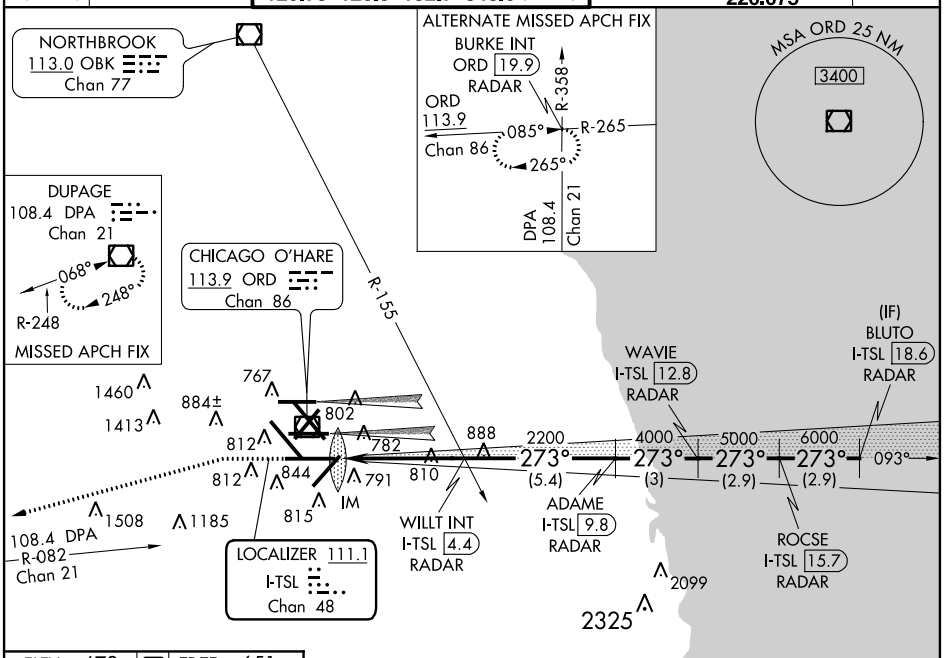

EC-3, 07 FEB 2013 to 07 MAR 2013

EC-3, 07 FEB 2013 to 07 MAR 2013

ELEV 672 D TDZE 651

RADAR REQUIRED

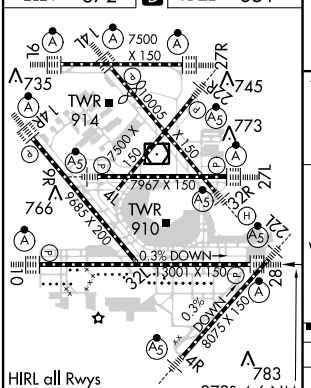

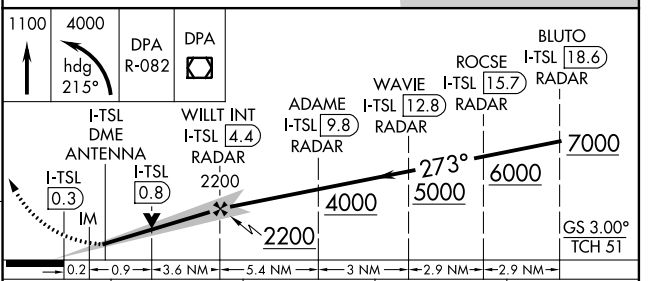

CATEGORY	A	B	C	D
S-ILS 28	851/18 200 (200-½)			
S-LOC 28	1060/24 409 (400-½)		1060/40 409 (400-¾)	
CIRCLING	1220-1 548 (600-1)		1220-1½ 548 (600-1½)	1240-2 568 (600-2)

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32