

LOC I-HNA 111.3	APP CRS 042°	Rwy ldg 7500
		THRE 656
		Apt Elev 672


LOC RWY 4L

CHICAGO-O'HARE INTL (ORD)

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct OBK VOR/DME and hold.


ATIS 282.225	CHICAGO APP CON 119.0 393.1	O'HARE TOWERS 128.15 (Rwy 9L/27R) 120.75 126.9 132.7 348.0 (CENTER)	(TWR NORTH) GND CON 124.125	(TWR CENTER) CON 121.75 (OBND) 121.9 (IBND) 226.675	CLNC DEL 121.6
------------------------	---------------------------------------	---	---------------------------------------	---	--------------------------

RADAR REQUIRED

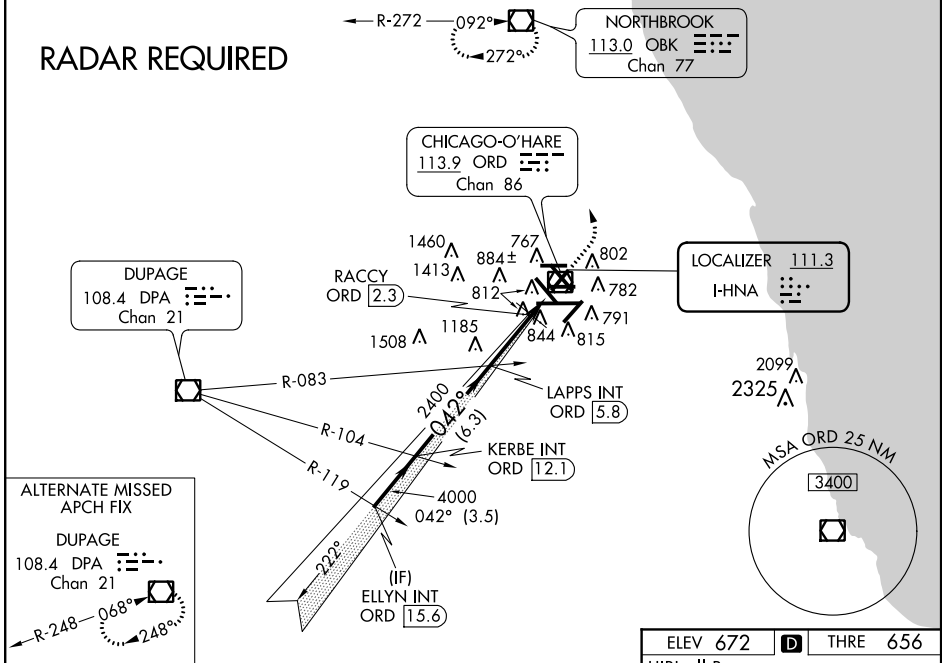

EC-3, 07 FEB 2013 to 07 MAR 2013

EC-3, 07 FEB 2013 to 07 MAR 2013

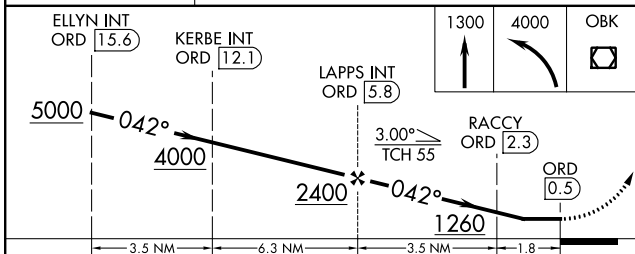

CATEGORY	A	B	C	D
S-4L	1260/55	604 (600-1¼)	1260-1¾	604 (600-1¾)
CIRCLING	1260-1	588 (600-1)	1260-1¾	1260-2
		588 (600-1¾)	588 (600-2)	
RACCY FIX MINIMUMS				
S-4L	1060/55	404 (400-1¼)	1060/60	404 (400-1¼)
CIRCLING	1220-1	548 (600-1)	1220-1½	1240-2
		548 (600-1½)	568 (600-2)	

