RNAV (GPS) RWY 25

TOLEDO EXPRESS (TOL)

WAAS	APP CRS	Rwy Idg	10599
CH 48899	252°	TDZE	678
W25A		Apt Elev	683

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½ mile, LNAV Cat D/E visibility to RVR 6000.

ASR

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct ATVIY and hold.

ATIS	TOLEDO APP CON	TOLEDO TOWER	GND CON	CLNC DEL
118.75 290.225	134.35 317.55	118.1 285.4	121.9 348.6	121.75 348.6

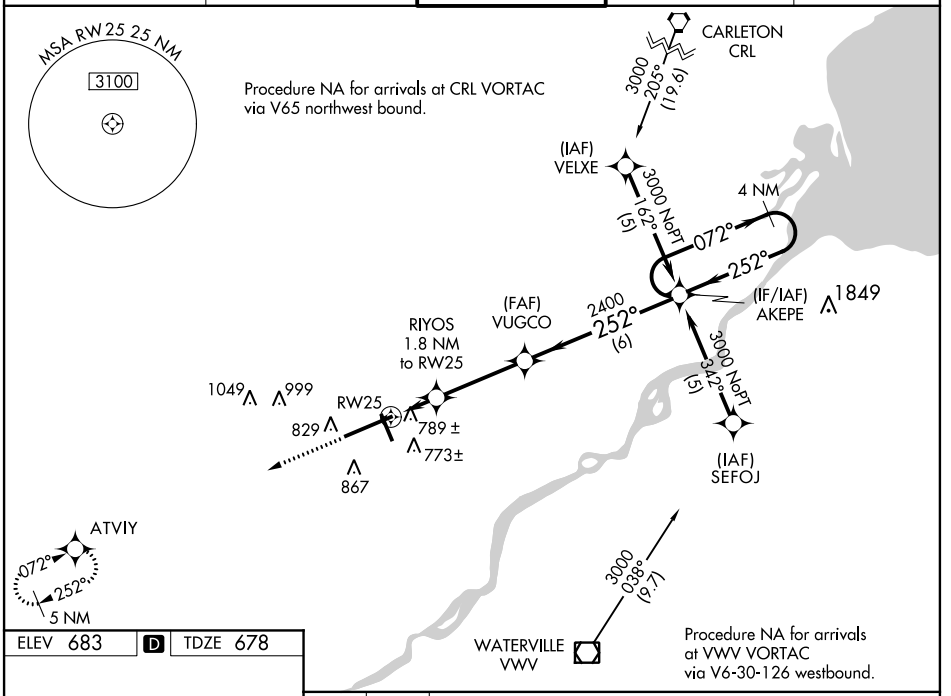

EC-2, 07 FEB 2013 to 07 MAR 2013

EC-2, 07 FEB 2013 to 07 MAR 2013

ELEV 683 D TDZE 678



TDZ/CL Rwy 7
HIRL Rwy 7-25
MIRL Rwy 16-34
REIL Rwys 16 and 34

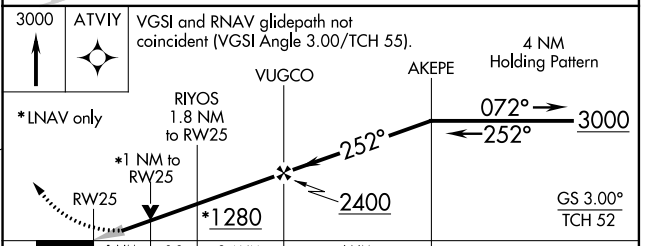

CATEGORY	A	B	C	D	E
LPV DA	878-24 200 (200-½)				
LNAV/VNAV DA	1065-50 387 (400-1)				
LNAV MDA	1040-24 362 (400-½)			1040-50 362 (400-1)	
CIRCLING	1180-1 497 (500-1)		1180-1½ 497 (500-1½)	1240-2 557 (600-2)	1400-2½ 717 (800-2½)