


BOWFN THREE DEPARTURE (RNAV) SL-198 (FAA)

SC-5, 07 FEB 2013 to 07 MAR 2013

ATIS 124.6
CLNC DEL 125.45
GND CON 121.9
HOBBY TOWER
118.7 256.9
HOUSTON DEP CON
127.125 269.075

TAKE-OFF MINIMUMS:

Rwy 12L, 12R, 30L, 30R, 35, Standard.
Rwy 4, 300-1 or Standard with minimum climb of 270' per NM to 300.
Rwy 17, 300-1
Rwy 22, Standard with minimum climb of 290' per NM to 1500.

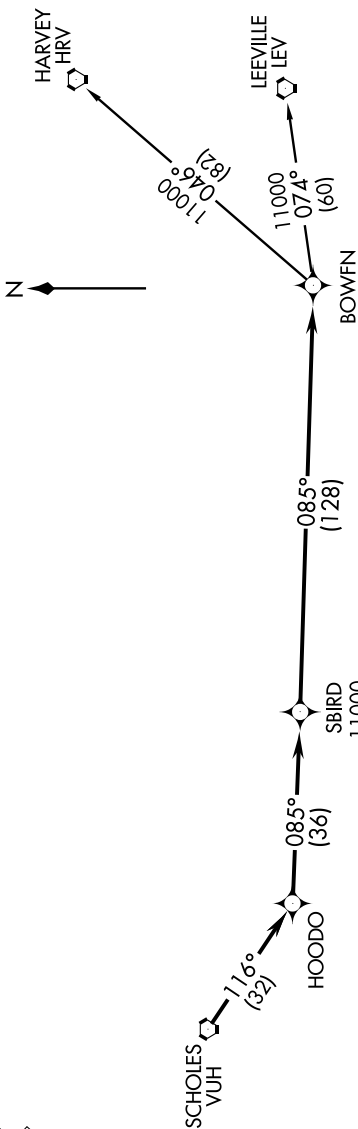

(NARRATIVE ON FOLLOWING PAGE)

DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for radar vectors to VUH VORTAC, maintain 5000 or ATC assigned altitude on depicted route to HOODOO. Then cross SBIRD at ... (transition). Expect filed altitude 10 minutes after departure.

HARVEY TRANSITION (BOWFN3.HRV)
LEEVILLE TRANSITION (BOWFN3.LEV)

NOTE: RNAV 1.
NOTE: RADAR Required.
NOTE: ATC assigned only. DO NOT FILE.
NOTE: DME/DME/IRU or GPS Required.
NOTE: For non-GPS equipped aircraft, LCH, LLA, TBD, and LEV DMEs must be operational.

NOTE: Chart not to scale.