WAAS	APP CRS	Rwy Idg	7602
CH 86209		TDZE	44
W04A	039°	Apt Elev	46

RNAV (GPS) RWY 4

HOUSTON/ WILLIAM P. HOBBY (HOU)

For inoperative MALSR, increase LPV visibility to RVR 4000 all Cats, and increase LNAV/VNAV and LNAV Cat E visibility to 1½. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 2000 direct RAYCI and hold.

ATIS	HOUSTON APP CON	HOBBY TOWER	GND CON	CLNC DEL
124.6	120.05 379.1 EAST 124.35 316.15 WEST	118.7 256.9	121.9	125.45

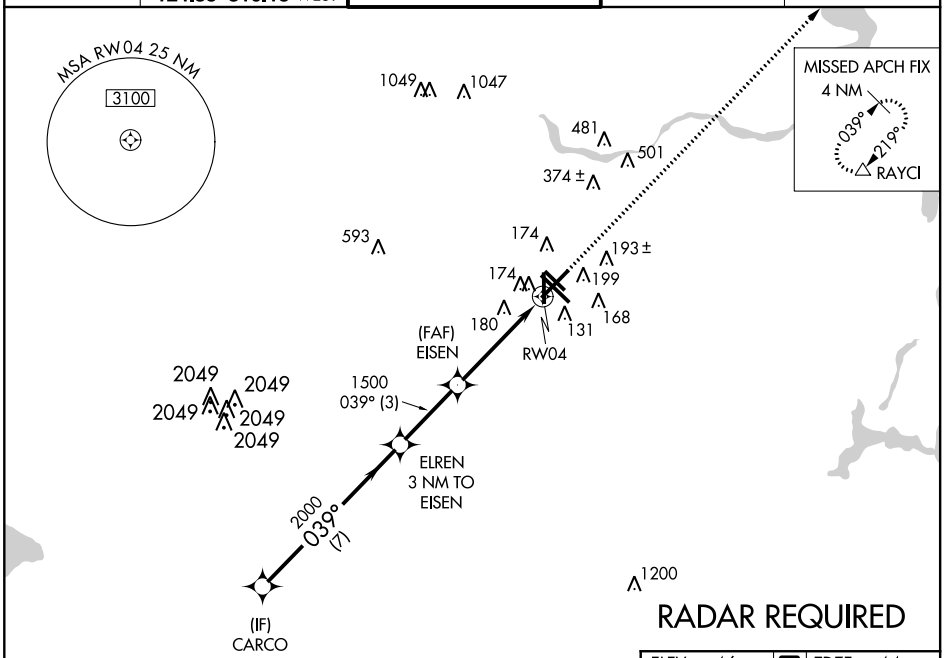

ELEV 46 | D | TDZE 44

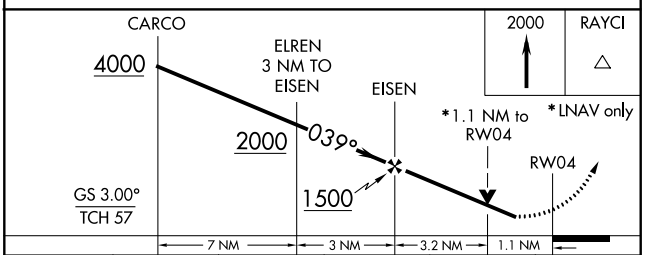

CATEGORY	A	B	C	D	E
LPV DA	300/24 256 (300-½)				
LNAV/VNAV DA	440/40 396 (400-¾)				440/50 396 (400-1)
LNAV MDA	460/24 416 (500-½)		460/40 416 (500-¾)	460/50 416 (500-1)	
CIRCLING	500-1¼ 454 (500-1¼)		520-1½ 474 (500-1½)	600-2 554 (600-2)	860-3 814 (900-3)

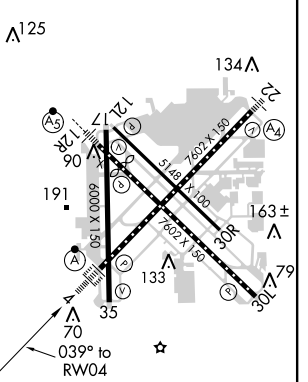

REIL Rwys 30L and 35
HIRL Rwys 4-22 and 12R-30L
MIRL Rwys 12L-30R and 17-35
TDZ/CL Rwys 4, 12R and 30L

SC-5, 07 FEB 2013 to 07 MAR 2013
SC-5, 07 FEB 2013 to 07 MAR 2013