ILS or LOC RWY 5R

INDIANAPOLIS INTL (IND)

LOC/DME I-OQV	APP CRS	Rwy Idg	10000
111.15	049°	TDZE	791
Chan 48 (Y)		Apt Elev	797

Simultaneous approach authorized with Rwy 5L.
For inoperative ALSF increase GOLSE Fix Minimums
S-LOC 5R Cat D visibility to RVR 5000. ADF Required.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct COLFA LOM and hold, continue climb-in-hold to 3000.

ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL
134.25	119.3 317.8	120.9 257.8	121.9 257.8	128.75 257.8

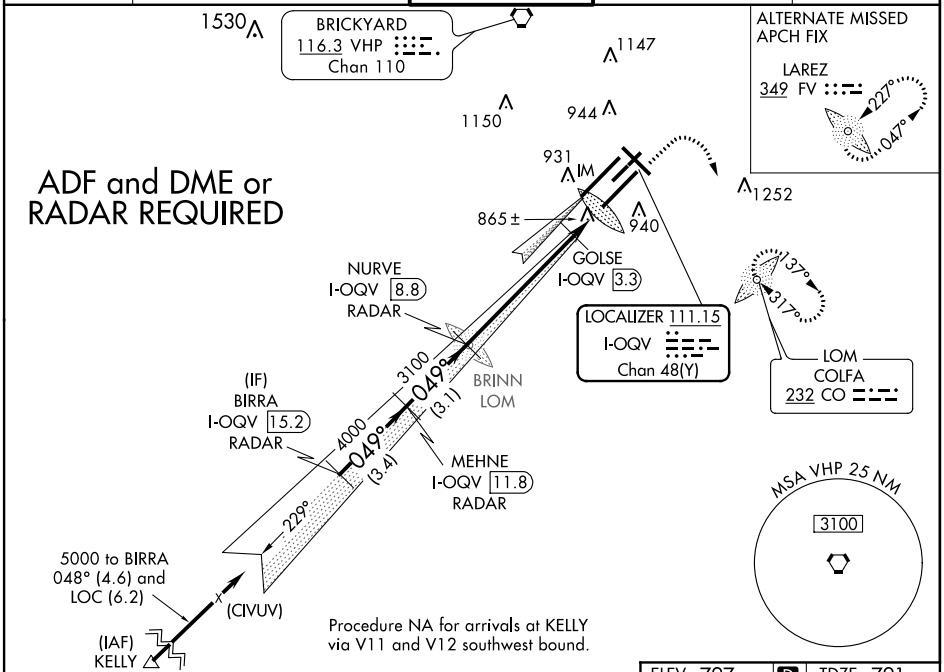

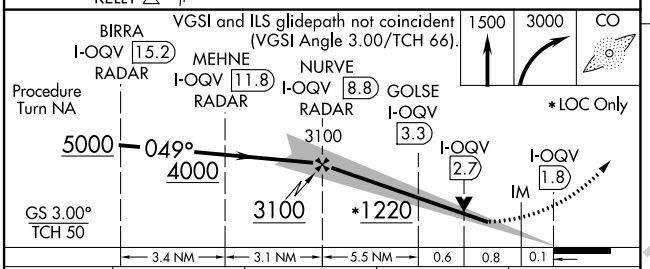

CATEGORY	A	B	C	D
S-ILS 5R	991/18 200 (200-½)			
S-LOC 5R	1220/24 429 (500-½)		1220/40 429 (500-¾)	1220/50 429 (500-1)
CIRCLING	1420-1 623 (700-1)		1420-1¾ 623 (700-1¾)	1420-2 623 (700-2)
GOLSE FIX MINIMUMS				
S-LOC 5R	1120/24 329 (400-½)			1120/40 329 (400-¾)
CIRCLING	1420-1 623 (700-1)		1420-1¾ 623 (700-1¾)	1420-2 623 (700-2)

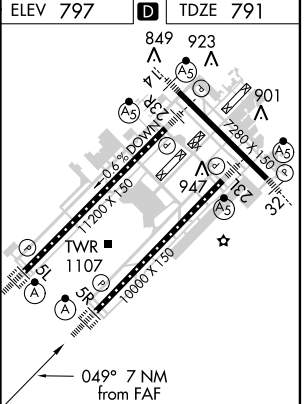

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

FAF to MAP 7 NM

Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20

EC-2, 07 FEB 2013 to 07 MAR 2013
EC-2, 07 FEB 2013 to 07 MAR 2013