LOC I-CRG	APP CRS	Rwy Idg	4008
111.7	319°	TDZE	41
		Apt Elev	41

ILS or LOC RWY 32

JACKSONVILLE/CRAIG MUNI (CRG)

When local altimeter setting not received, use Jacksonville Intl altimeter setting and increase all DA to 273, all MDA 40 feet and increase S-LOC Cats. C and D visibility ¼ mile. DME or RADAR REQUIRED.

MALSR

MISSED APPROACH: Climb to 700 then climbing right turn to 1900 via CRG VORTAC R-139 to JEVAG/CRG 11.8 DME/RADAR and hold.

ATIS	JACKSONVILLE APP CON	CRAIG TOWER ★	GND CON	CLNC DEL	UNICOM
125.4	124.9 308.4	132.1(CTAF) L 257.625	121.8	118.35	122.95

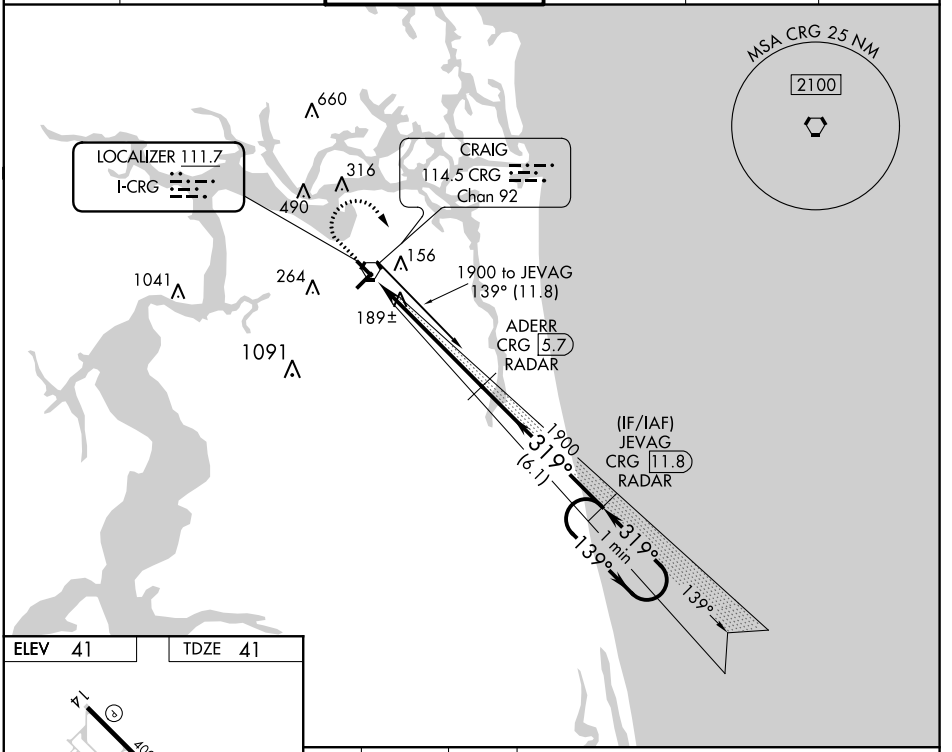

ELEV 41 TDZE 41



MIRL Rwy 5-23 L
HIRL Rwy 14-32 L
REIL Rwys 14 and 23 L

FAF to MAP 5.6 NM					
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

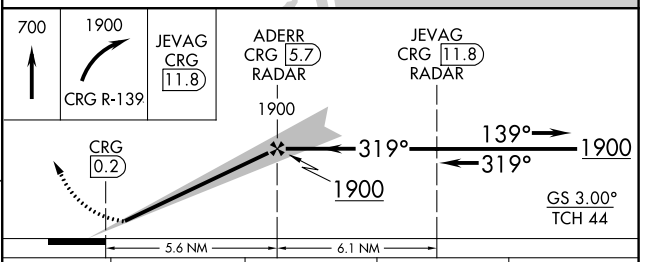

CATEGORY	A	B	C	D
S-ILS 32	241-½ 200 (200-½)			
S-LOC 32	440-½ 399 (400-½)			440-¾ 399 (400-¾)
CIRCLING	500-1 459 (500-1)	580-1 539 (600-1)	580-1½ 539 (600-1½)	600-2 559 (600-2)

SE-3, 07 FEB 2013 to 07 MAR 2013
SE-3, 07 FEB 2013 to 07 MAR 2013