

APCH CRS	Rwy ldg	8002
276°	TDZE	12
	Arpt Elev	20

AL-209 [USN]

JACKSONVILLE NAS (TOWERS FIELD) (KNIP)

▼ *When ALS inop, increase vis CAT ABCD to 1 mile.
 **When ALS inop, increase vis CAT AB to 1 mile, CAT CD to 1½ miles.




MISSED APPROACH: Climbing left turn to 3000 direct DUWOT and hold.


ATIS 281.0	JACKSONVILLE APP CON 123.8 377.05	NAVY JACKSONVILLE TOWER 120.0 340.2	GND CON 128.6 336.4	CLNC DEL 134.775 353.675	ASR/PAR
----------------------	---	---	-------------------------------	------------------------------------	---------

DME/DME RNP-0.3 NA.

For uncompensated BARO-VNAV systems, LNAV/VNAV NA below -15°C(5°F) and above 42°C(107°F).

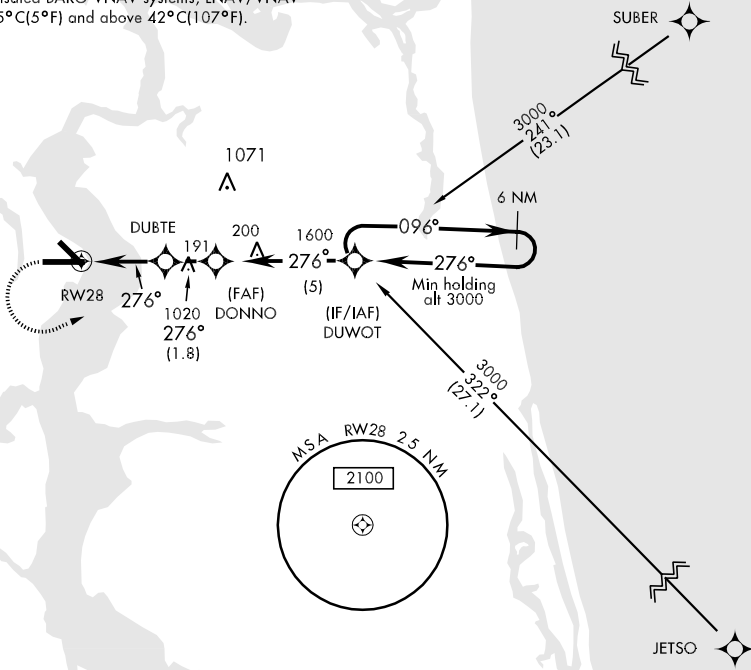


EMERGENCY SAFE ALT 100 NM 2800

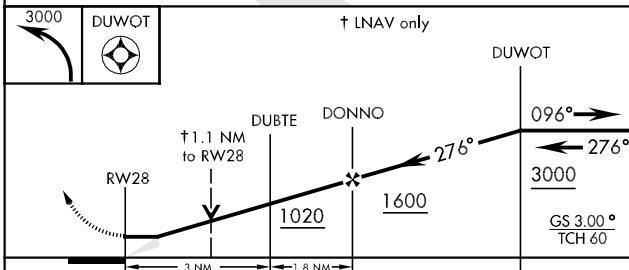

CATEGORY	A	B	C	D
LNAV/VNAV DA*	340-½	328 (400-½)	340-¾	328 (400-¾)
LNAV MDA**	420-½	408 (400-½)	420-¾	408 (400-¾)
CIRCLING	480-1	460 (500-1)	480-1½	580-2 560 (600-2)

ELEV 20

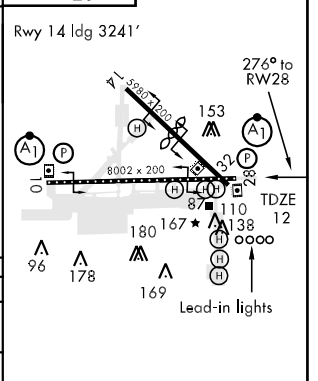

HIRL All Rwy
REIL Rwy 10-28, 32

SE-3, 07 FEB 2013 to 07 MAR 2013

SE-3, 07 FEB 2013 to 07 MAR 2013