RNAV (GPS) RWY 9

LAWRENCEVILLE-VINCENNES INTL (LWV)

WAAS	APP CRS	Rwy Idg	5198
CH 93728	090°	THRE	426
W09A		Apt Elev	430

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Mount Carmel altimeter setting and increase all DA 26 feet and all MDA 40 feet: increase LPV all Cats, LNAV/VNAV all Cats, and LNAV Cat C/D visibilities ⅛ mile.

MISSED APPROACH: Climb to 2600 direct YONUB and hold.

ASOS	EVANSVILLE APP CON ★	UNICOM
118.0	125.6 267.9	122.8 (CTAF) L

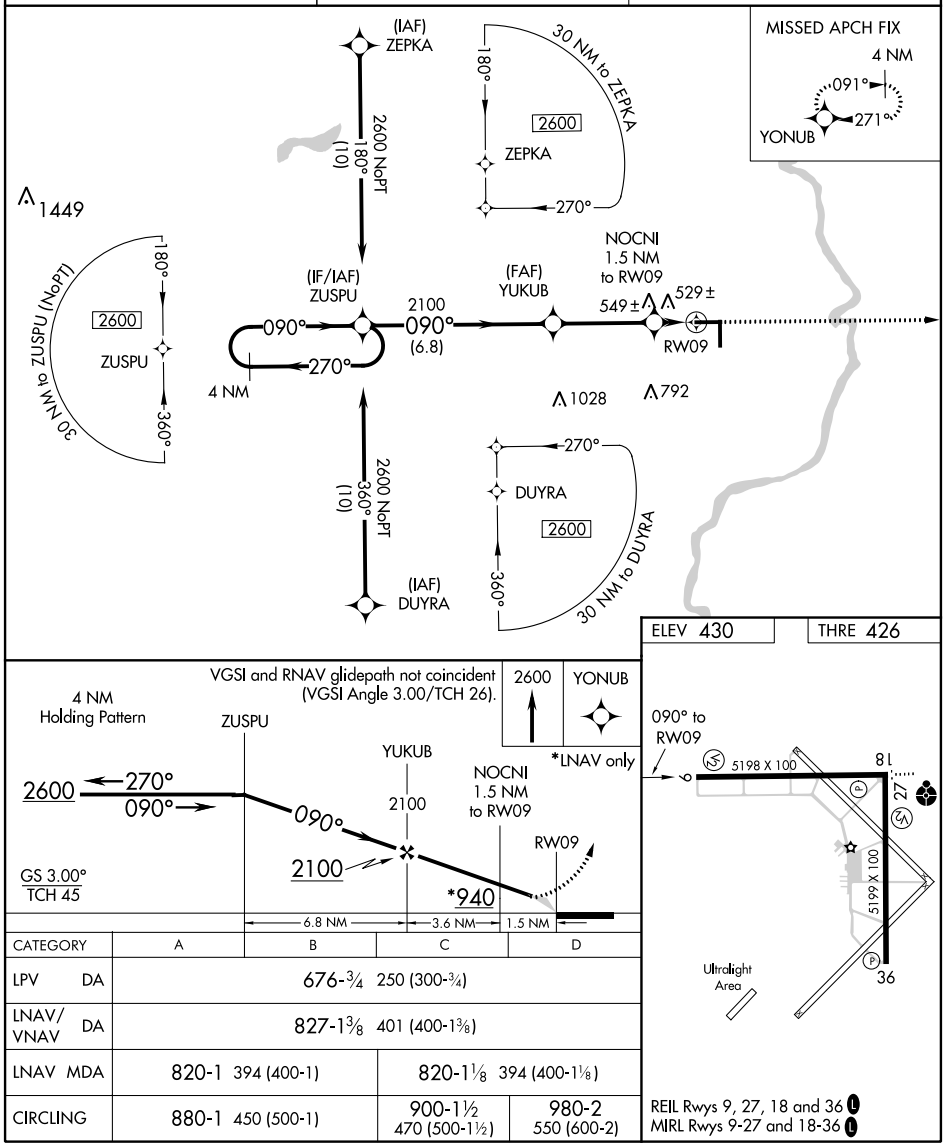

CATEGORY	A	B	C	D
LPV DA	676-¾ 250 (300-¾)			
LNAV/VNAV DA	827-1⅜ 401 (400-1⅜)			
LNAV MDA	820-1 394 (400-1)		820-1⅛ 394 (400-1⅛)	
CIRCLING	880-1 450 (500-1)		900-1½ 470 (500-1½)	980-2 550 (600-2)

REIL Rwys 9, 27, 18 and 36 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 07 FEB 2013 to 07 MAR 2013
EC-3, 07 FEB 2013 to 07 MAR 2013