ILS or LOC RWY 17R

LUBBOCK PRESTON SMITH INTL (LBB)

LOC/DME I-LBB	APP CRS	Rwy Idg	11500
111.7	171°	TDZE	3282
Chan 54		Apt Elev	3282

ASR * RVR 1800 authorized with the use of FD or AP or HUD to DA. For inoperative MALSR, increase S-ILS 17R Cat E visibility to RVR 4000, increase S-LOC 17R Cat D visibility to RVR 5000, and Cat E visibility to 6000.

MALSR

MISSED APPROACH: Climb to 3700 then climbing left turn to 6000 via LBB VORTAC R-114 to HYDRO Int/LBB 14.2 DME and hold, continue climb-in-hold to 6000.

ATIS	LUBBOCK APP CON	LUBBOCK TOWER	GND CON	CLNC DEL
125.3	119.2 351.8	120.5 239.3	121.9 348.6	125.8 281.55

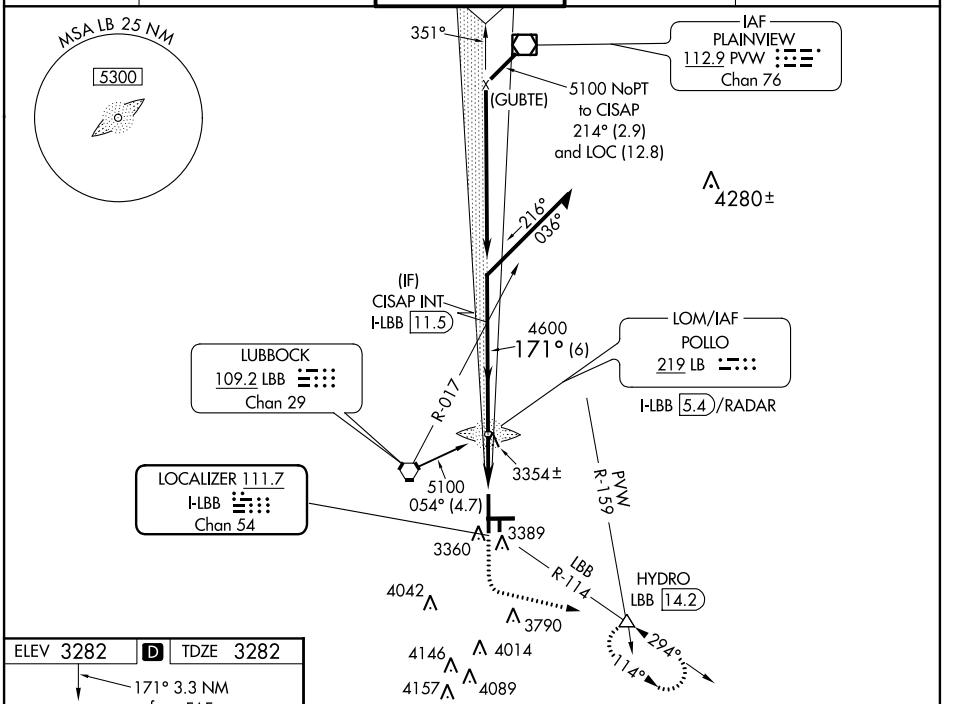

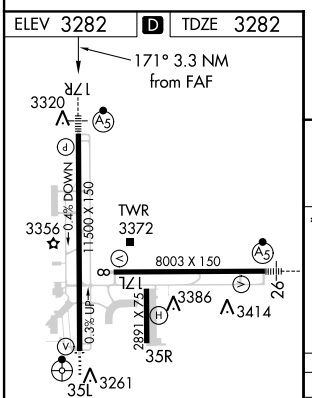

REIL Rwy 8
HIRL Rwys 8-26 and 17R-35L

FAF to MAP 3.3 NM					
Knots	60	90	120	150	180
Min:Sec	3:18	2:12	1:39	1:19	1:06

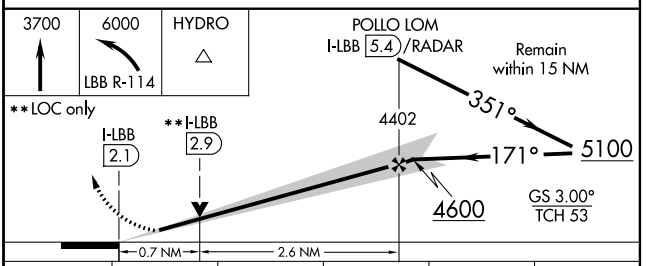

CATEGORY	A	B	C	D	E
S-ILS 17R	*3482/24 200 (200-½)				
S-LOC 17R	3620/24 338 (400-½)			3620/40 338 (400-¾)	
CIRCLING	3720-1 438 (500-1)	3740-1 458 (500-1)	3740-1½ 458 (500-1½)	3840-2 558 (600-2)	3980-2½ 698 (700-2½)

SC-2, 07 FEB 2013 to 07 MAR 2013
SC-2, 07 FEB 2013 to 07 MAR 2013