

WAAS CH <b>86421</b> <b>W28A</b>	APP CRS <b>279°</b>	Rwy Idg THRE Apt Elev	<b>4694</b> <b>412</b> <b>437</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 28

MACON DOWNTOWN (MAC)

Use Middle Georgia Rgnl altimeter setting; when not received, use Robins AFB altimeter setting and increase all MDAs 20 feet and LP Cat C and D visibility 1/8 mile. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When VGSI inoperative, procedure NA at night.

MISSED APPROACH: Climb to 3000 direct KODRE and on track 259° to FOBES and hold.



MIDDLE GEORGIA RGNL ASOS★ <b>120.775</b>	ATLANTA APP CON★ <b>124.2 279.6</b>	UNICOM <b>123.0 (CTAF) 0</b>
---	--	---------------------------------

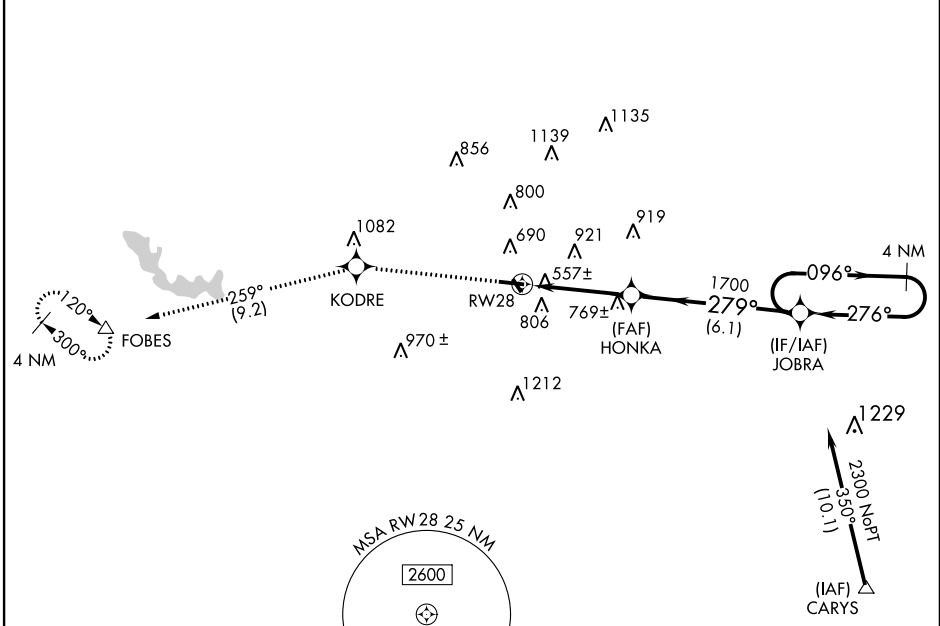

SE-4, 07 FEB 2013 to 07 MAR 2013

SE-4, 07 FEB 2013 to 07 MAR 2013

ELEV <b>437</b>	THRE <b>412</b>
-----------------	-----------------

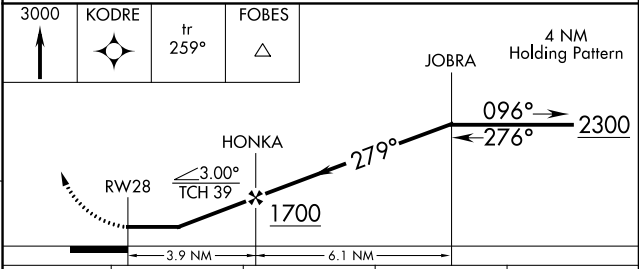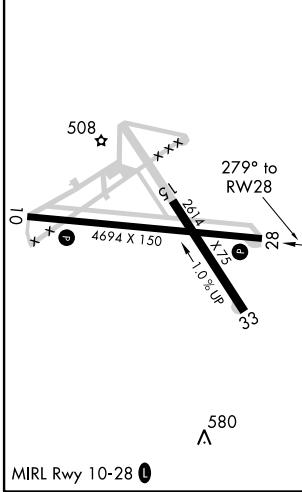

CATEGORY	A	B	C	D
LP MDA	840-1	428 (500-1)	840-1¼	428 (500-1¼)
LNAV MDA	1000-1	588 (600-1)	1000-1¾	588 (600-1¾)
CIRCLING	1200-1	763 (800-1)	1200-2¼ 763 (800-2¼)	1320-3 883 (900-3)