

|                        |                             |   |
|------------------------|-----------------------------|---|
| APP CRS<br><b>143°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8800</b><br><b>1303</b><br><b>1335</b> |
|------------------------|-----------------------------|---|


# RNAV (RNP) Z RWY 14

MEDFORD/ ROGUE VALLEY INTL-MEDFORD (MFR)

GPS required. RF required. For uncompensated Baro-VNAV systems, procedure NA below -8°C (17°F) or above 46°C (115°F). \*Missed approach requires minimum climb of 259 feet per NM to 8300. For inoperative MALS/R, increase RNP 0.30 DA\* all Cats visibility to RVR 6000, increase RNP 0.30 DA all Cats visibility to 3.

MALS/R MISSED APPROACH: Climb to 9000 on track 143° to WEMOM, left turn to CUDUB, right turn to HUBUX, left turn to HORUG, then on track 310° to CUTTR and hold.


|                       |  |   |                         |                         |
|-----------------------|--|---|-------------------------|-------------------------|
| ATIS<br><b>127.25</b> | CASCADE APP CON*<br><b>124.3 379.9</b> | MEDFORD TOWER*<br><b>119.4 (CTAF) 0 257.8</b> | GND CON<br><b>121.8</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|---|-------------------------|-------------------------|

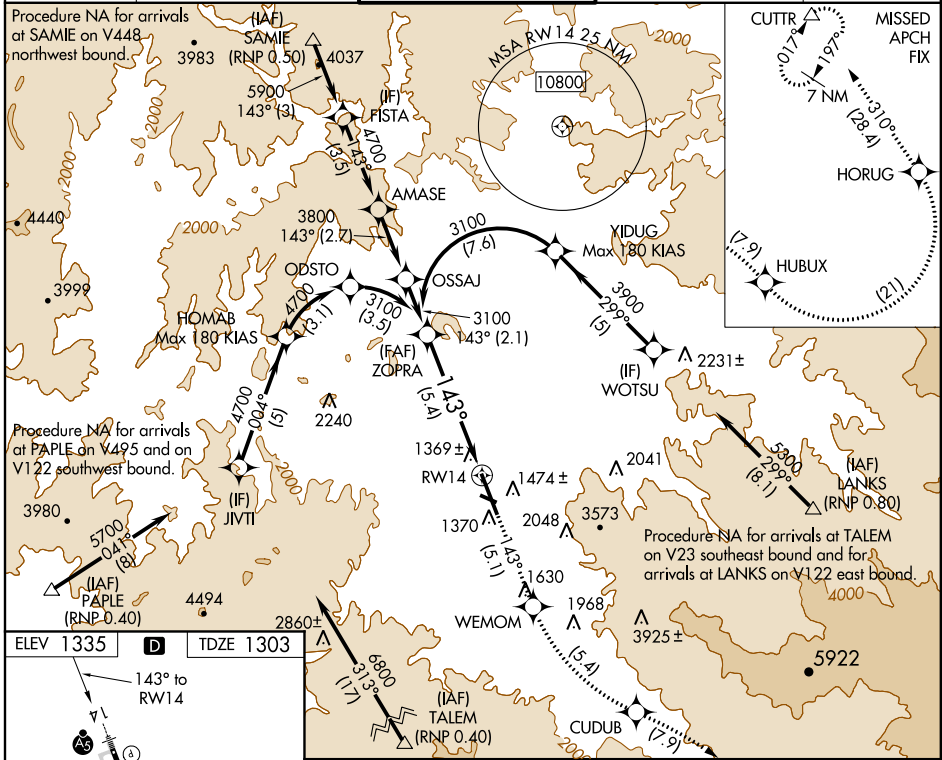

NW-1, 07 FEB 2013 to 07 MAR 2013

NW-1, 07 FEB 2013 to 07 MAR 2013

|           |          |           |
|-----------|----------|-----------|
| ELEV 1335 | <b>D</b> | TDZE 1303 |
|-----------|----------|-----------|

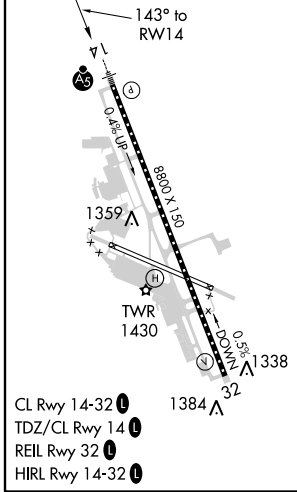

|  |   |         |       |       |
|--|---|---------|-------|-------|
| Procedure  | ZOPRA                                   | 9000    | WEMOM | CUDUB |
| Turn NA  | 3100                                    | tr 143° |       |       |
| VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 73). |   |         |       |       |
| GP 3.00° TCH 58  | See planview for multiple IF locations. |         |       |       |

|              |                            |   |   |   |
|--------------|----------------------------|---|---|---|
| CATEGORY     | A                          | B | C | D |
| RNP 0.30 DA* | 1665/40 362 (400-3/4)      |   |   |   |
| RNP 0.30 DA  | 2131-2 1/2 828 (800-2 1/2) |   |   |   |

**AUTHORIZATION REQUIRED**