

ELVIS ONE DEPARTURE

SL-253 (FAA)


MEMPHIS INTL (MEM)
MEMPHIS, TENNESSEE

ATIS 127.75
 CLNIC DEL
 125.2
 MEMPHIS TOWER
 (Rwys 18C-36C, 18L-36R)
 119.7 257.8
 (Rwy 18R-36L)
 128.425 257.8
 (Rwy 9-27)
 118.3 257.8
 GND CON
 (Rwys 18C-36C, 18L-36R)
 121.9 379.2
 (Rwy 18R-36L)
 121.65 379.2
 (Rwy 9-27)
 121.0 379.2

MEMPHIS DEP CON
 EONEE, ETWOO, ETREE, EFOUR
 NTRREE, NFOUR, NFIVE, SONEI
 TRANSITIONS: 124.15
 NRONE, NTWOO, STWOO, STREE
 SFOUR, WONEE, WTWOO, WTREE,
 WFOUR, WFIVE TRANSITIONS: 124.65

SE-1, 07 FEB 2013 to 07 MAR 2013

SE-1, 07 FEB 2013 to 07 MAR 2013

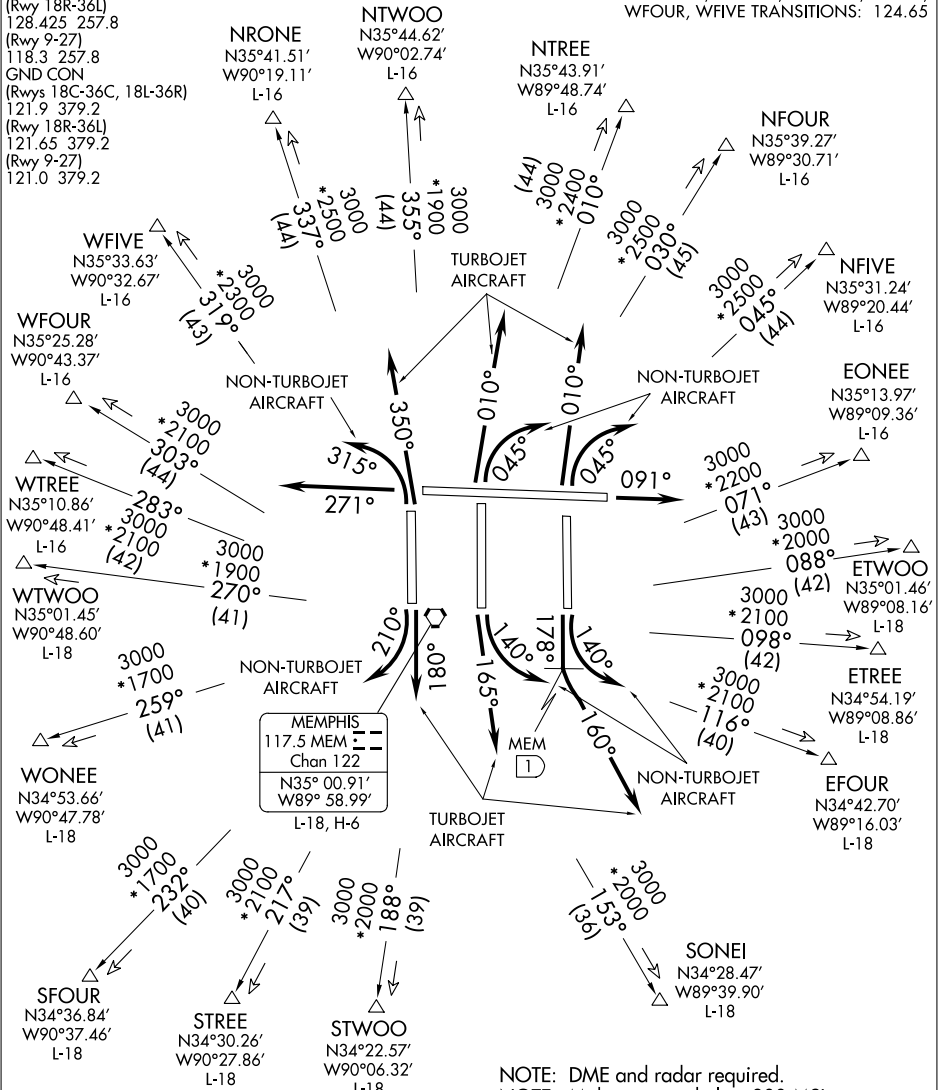

TAKEOFF MINIMUMS:
 Rwys 9, 18C, 18R, 27, 36L, 36C, 36R: Standard.
 Rwy 18L: Props: Standard; Turbojets: ATC
 climb of 340' per NM to 800.

NOTE: DME and radar required.
 NOTE: Make no turns below 800 MSL.
 NOTE: Transponder code will be issued
 via PDC or Memphis clearance delivery.

(NARRATIVE ON FOLLOWING PAGES)

NOTE: Chart not to scale.

ELVIS ONE DEPARTURE