

LOC/DME I-MYO 111.35 Chan 50 (Y)	APP CRS 360°	Rwy ldg TDZE Apt Elev	9000 335 341
---	------------------------	-----------------------------	---

ILS RWY 36R (CAT II)

MEMPHIS INTL (MEM)

Simultaneous approach authorized with Rwy 36L.
DME or Radar required.


MISSED APPROACH: Climb to 1000 then climbing right turn to 5000 via heading 070° and MEM VORTAC R-040 to OROCU INT/MEM 15 DME and hold, continue climb-in-hold to 5000.

MEMPHIS APP CON 119.1 291.6 (176°-355°) 125.8 338.3 (356°-175°)	MEMPHIS TOWER (Rwy 9-27) 118.3 257.8 (Rwys 18C-36C, 18L-36R) 119.7 257.8 (Rwy 18R-36L) 128.425 257.8	GND CON (Rwy 9-27) 121.0 379.2 (Rwys 18C-36C, 18L-36R) 121.9 379.2 (Rwy 18R-36L) 121.65 379.2
---	--	---



ATIS
127.75

RADAR REQUIRED

CLNC DEL
125.2

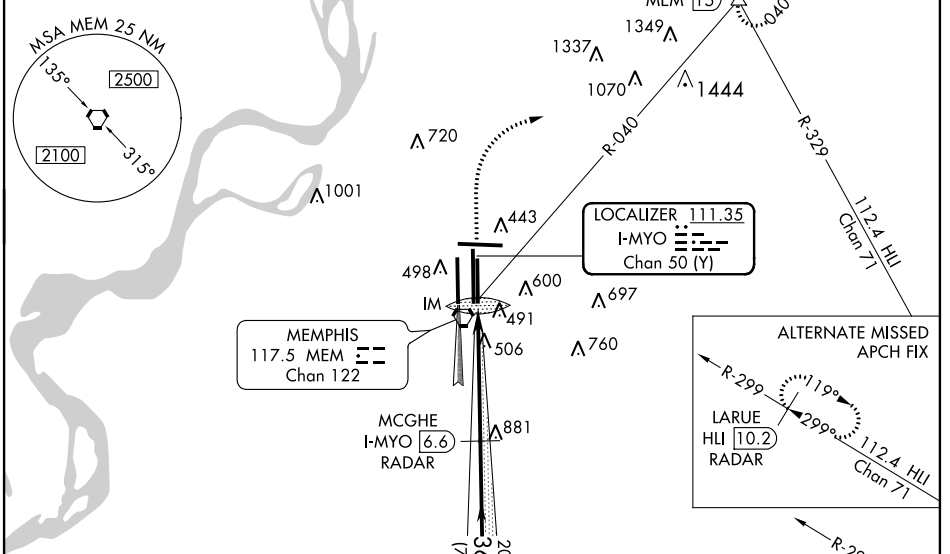

ELEV 341	D	TDZE 335
----------	----------	----------

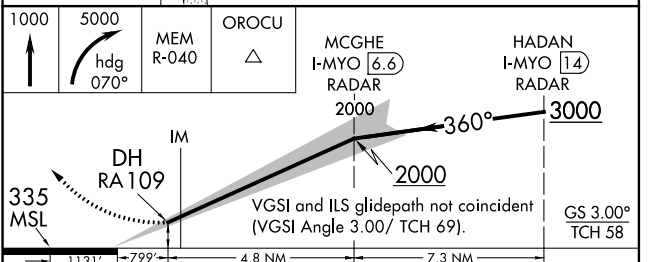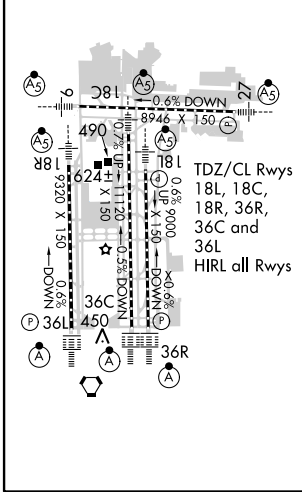

CATEGORY	A	B	C	D
S-ILS 36R	RA 109/12 100 DA 435			
CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED				

SE-1, 07 FEB 2013 to 07 MAR 2013

SE-1, 07 FEB 2013 to 07 MAR 2013