RNAV (GPS) RWY 8L

MIAMI INTL (MIA)

WAAS	APP CRS	Rwy Idg	8600
CH 42703	092°	TDZE	8
W08A		Apt Elev	8

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2000 direct KUTEY and via 128° track to VIRGINIA KEY VOR/DME and hold.

ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL
119.15	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6	135.35

RADAR REQUIRED

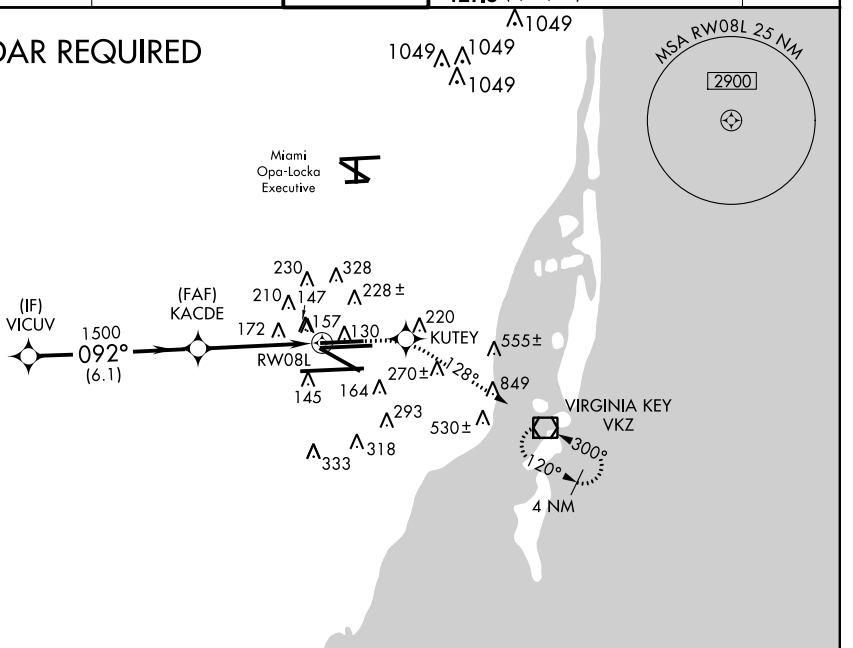

#1500 when assigned by ATC.

2000	KUTEY	128° tr	VKZ

*LNAV only

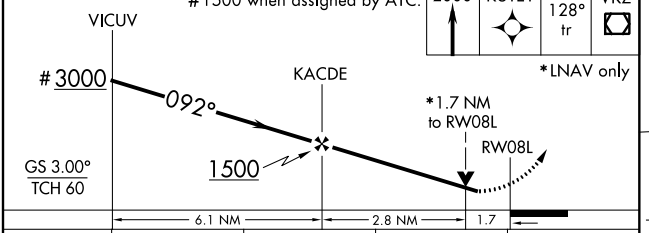

CATEGORY	A	B	C	D
LPV DA	306-1 298 (300-1)			
LNAV/VNAV DA	530-1¾ 522 (600-1¾)			
LNAV MDA	600-1 592 (600-1)		600-1½ 592 (600-1½)	600-1¾ 592 (600-1¾)
CIRCLING	NA			

ELEV 8 D TDZE 8



TDZ/CL Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

SE-3, 07 FEB 2013 to 07 MAR 2013
SE-3, 07 FEB 2013 to 07 MAR 2013