WAAS	APP CRS	Rwy Idg	8302
CH 69310	105°	THRE	2869
W10A		Apt Elev	2872

RNAV (GPS) RWY 10

MIDLAND INTL (MAF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 16L NA at night. For inoperative MALSR, increase LNAV Cats C/D visibility to 1¾ miles.

ASR

MALSR

MISSED APPROACH: Climb to 4700 direct EASYY and hold.

ATIS	MIDLAND APP CON★	MIDLAND TOWER★	GND CON	CLNC DEL	UNICOM
126.8 235.975	124.6 290.4	118.7 (CTAF) L 273.45	121.9 348.6	118.05 317.65	122.95

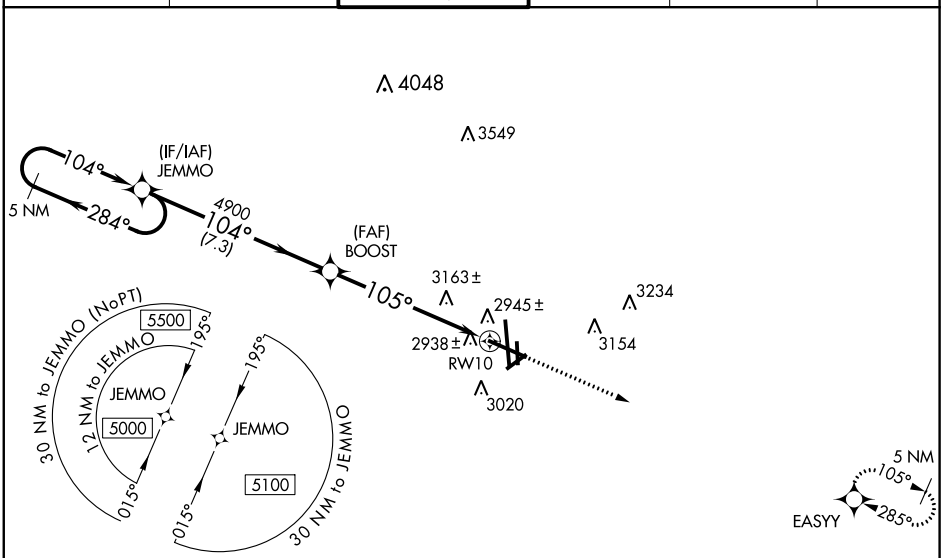

SC-3, 07 FEB 2013 to 07 MAR 2013

SC-3, 07 FEB 2013 to 07 MAR 2013

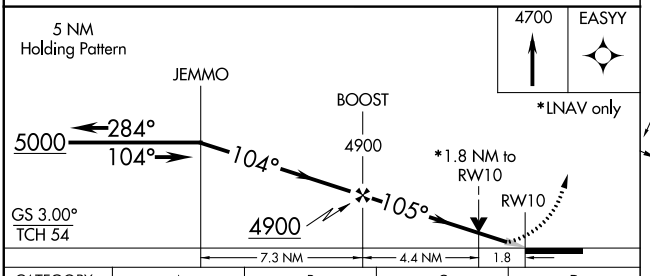

CATEGORY	A	B	C	D
LPV DA	3069/24 200 (200-½)			
LNAV/VNAV DA	3394/60 525 (600-1¼)			
LNAV MDA	3480/24 611 (700-½)		3480-1⅜ 611 (700-1⅜)	
CIRCLING	3480-1 608 (700-1)		3480-1¾ 608 (700-1¾)	3520-2 648 (700-2)
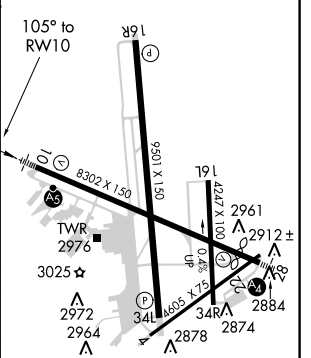
ELEV 2872 D THRE 2869