



WAAS CH 61329 W16A	APP CRS 166°	Rwy Idg THRE Apt Elev	9501 2872 2872
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16R


MIDLAND INTL (MAF)

ASR	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling Rwy 16L NA at night.	MISSED APPROACH: Climb to 4700 direct ICORO and hold.
------------	--	---

ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95
------------------------------	--	---	-------------------------------	----------------------------------	-------------------------

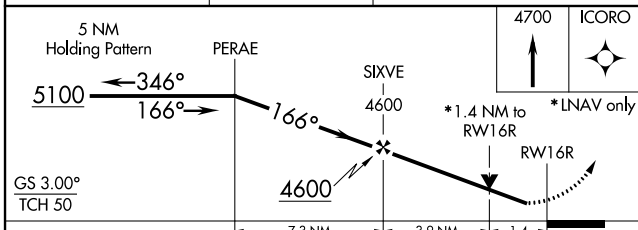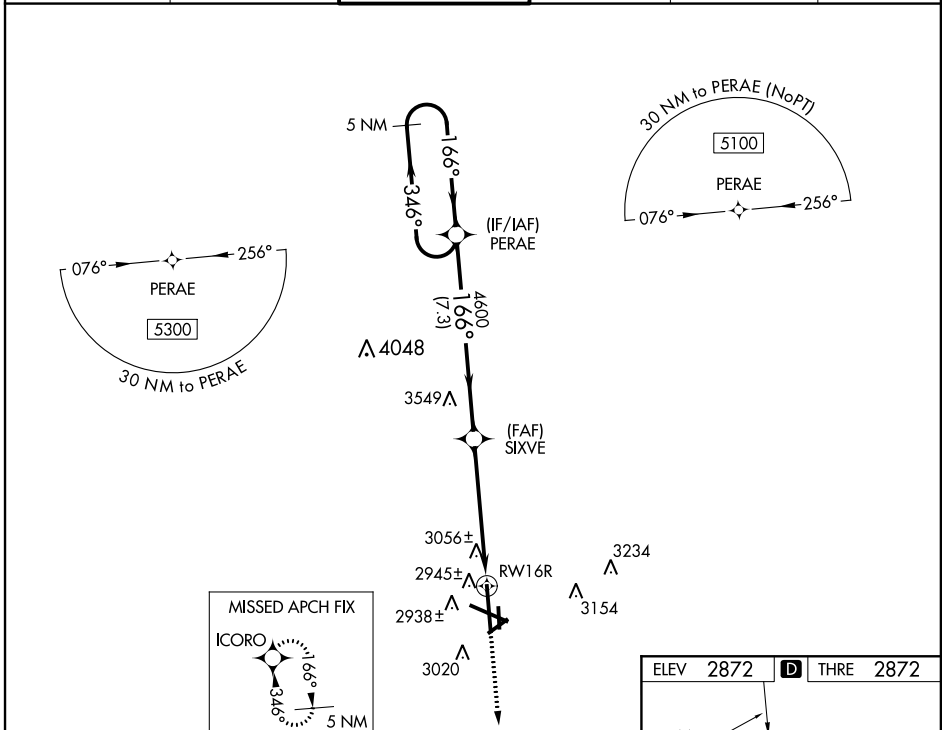

CATEGORY	A	B	C	D
LPV DA		3072-3/4	200 (200-3/4)	
LNAV/VNAV DA		3398-13/4	526 (600-13/4)	
LNAV MDA	3360-1	488 (500-1)	3360-13/8	488 (500-13/8)
CIRCLING	3440-1	568 (600-1)	3440-11/2	3520-2
			568 (600-11/2)	648 (700-2)

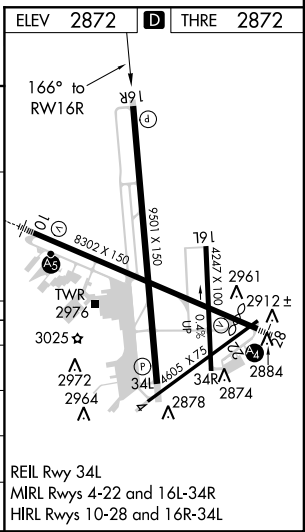

SC-3, 07 FEB 2013 to 07 MAR 2013

SC-3, 07 FEB 2013 to 07 MAR 2013