

WAAS CH 50429 W22A	APP CRS 225°	Rwy Idg THRE 2855 Apt Elev 2872	4605
--	------------------------	---	-------------



RNAV (GPS) RWY 22

MIDLAND INTL (M.A.F.)

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 16L NA at night.


MISSED APPROACH: Climb to 5000 direct TOKRE and hold.

ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95
------------------------------	--	---	-------------------------------	----------------------------------	-------------------------

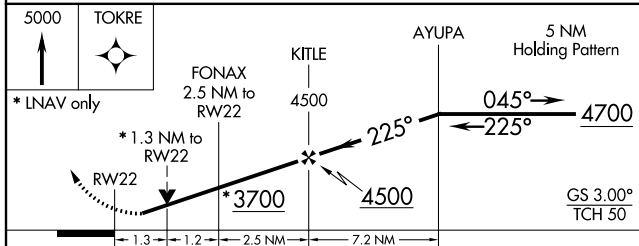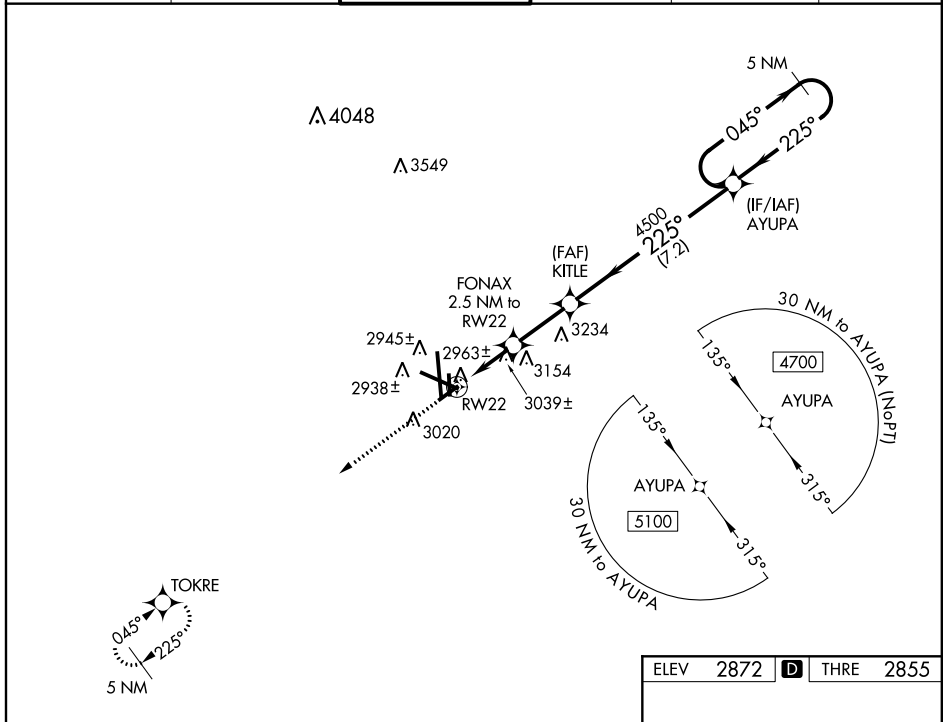

CATEGORY	A	B	C	D
LPV DA		3055- ³ / ₄	200 (200- ³ / ₄)	
LNAV/VNAV DA		3134- ⁷ / ₈	279 (300- ⁷ / ₈)	
LNAV MDA	3320-1	465 (500-1)	3320-1 ³ / ₈	465 (500-1 ³ / ₈)
CIRCLING	3440-1	568 (600-1)	3440-1 ¹ / ₂ 568 (600-1 ¹ / ₂)	3520-2 648 (700-2)

ELEV 2872	D	THRE 2855
-----------	----------	-----------

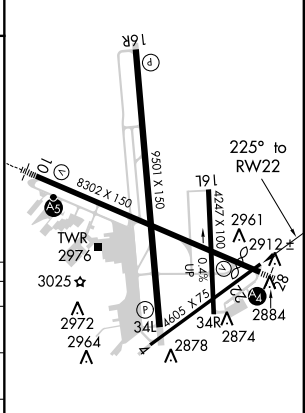

REIL Rwy 34L
MIRL Rwy 4-22 and 16L-34R
HIRL Rwy 10-28 and 16R-34L

SC-3, 07 FEB 2013 to 07 MAR 2013

SC-3, 07 FEB 2013 to 07 MAR 2013