


WAAS CH 97506 W14A	APP CRS 145°	Rwy Idg THRE 213 Apt Elev 219
--	------------------------	---

RNAV (GPS) RWY 14

MOBILE RGNL (MOB)



<p>ASR</p> <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cats C/D visibility to RVR 6000.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 2000 direct JOTEN and on track 187° to SAINT and hold.</p>
---	---------------------	--

<p>ATIS</p> <p>124.75 257.85</p>	<p>MOBILE APP CON *</p> <p>118.5 269.3</p>	<p>MOBILE TOWER *</p> <p>118.3 (CTAF) 239.0</p>	<p>GND CON</p> <p>121.9 348.6</p>	<p>CLNC DEL</p> <p>119.85</p>	<p>UNICOM</p> <p>122.95</p>
---	---	--	--	--------------------------------------	------------------------------------

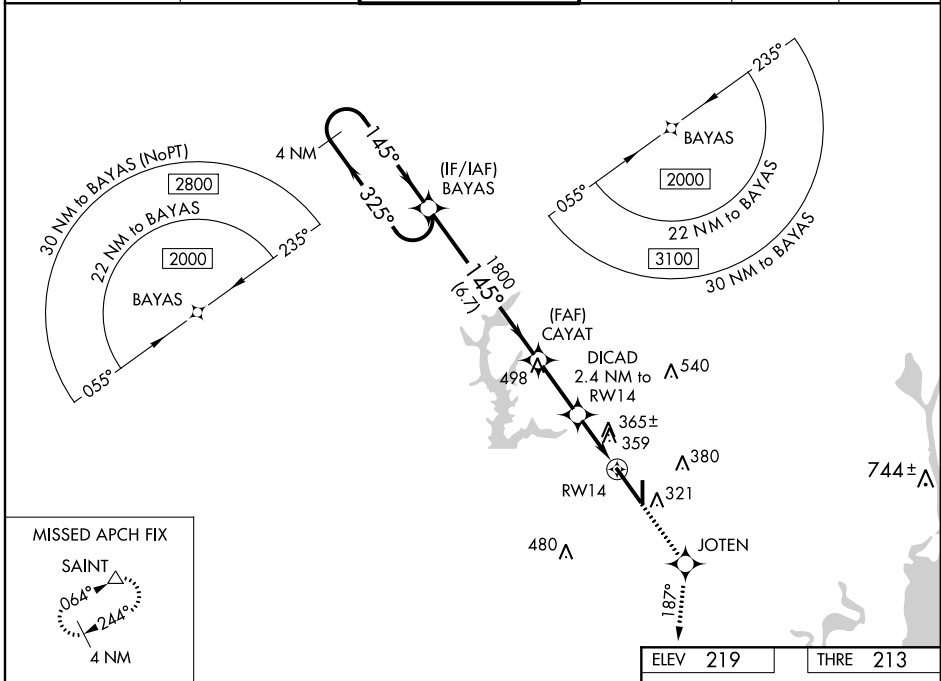

SE-4, 07 FEB 2013 to 07 MAR 2013

SE-4, 07 FEB 2013 to 07 MAR 2013

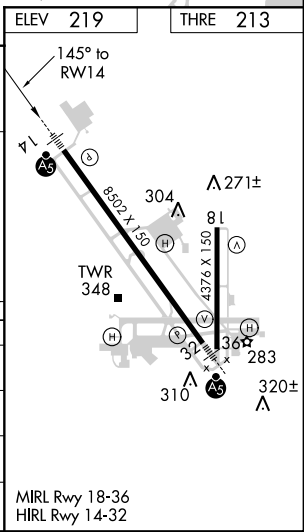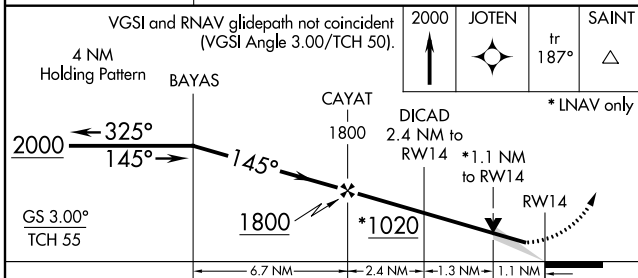

CATEGORY	A	B	C	D
LPV DA		413/24	200 (200-½)	
LNAV/VNAV DA		634/45	421 (500-¾)	
LNAV MDA	620/24	407 (500-½)	620/40	407 (500-¾)
CIRCLING	680-1	461 (500-1)	680-1½ 461 (500-1½)	780-2 561 (600-2)