RNAV (GPS) RWY 36

MOBILE DOWNTOWN (BFM)

WAAS	APP CRS	Rwy Idg	7800
CH 56511	001°	TDZE	26
W36A		Apt Elev	26

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase all DA 50 feet and all MDA 60 feet, increase LPV, LNAV/VNAV all Cats., LNAV Cat. D and Circling Cats. C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Mobile Rgnl altimeter setting.

MISSED APPROACH: Climb to 2000 direct OTMEE and hold.

ATIS	MOBILE APP CON ★	DOWNTOWN TOWER ★	GND CON	UNICOM
135.575	118.5 269.3	118.8 (CTAF) L 251.1	121.7 239.3	122.95

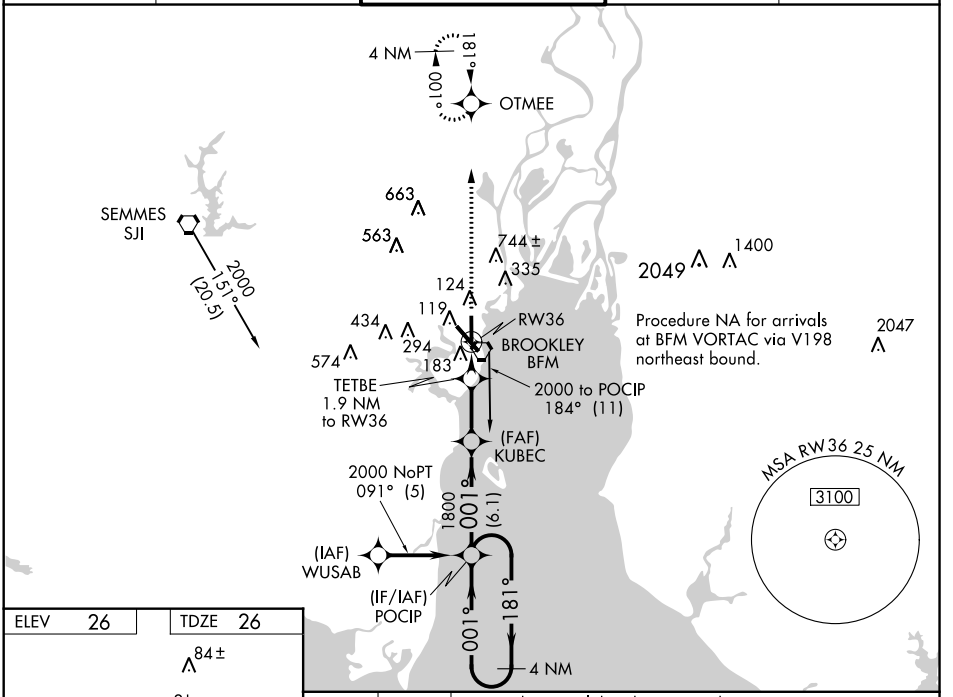

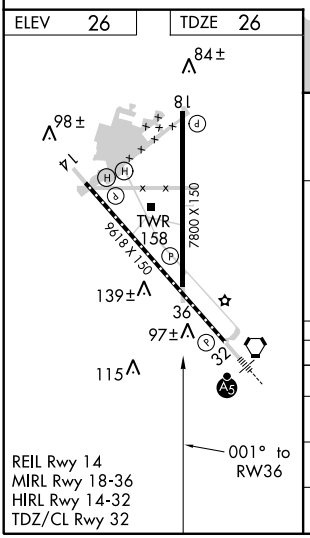

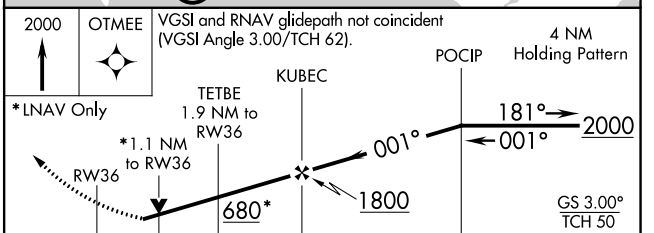

CATEGORY	A	B	C	D
LPV DA	340-1 314 (400-1)			
LNAV/VNAV DA	586-2 560 (600-2)			
LNAV MDA	440-1 414 (500-1)		440-1¼ 414 (500-1¼)	
CIRCLING	680-1 654 (700-1)		680-1¾ 654 (700-1¾)	680-2 654 (700-2)

SE-4, 07 FEB 2013 to 07 MAR 2013
SE-4, 07 FEB 2013 to 07 MAR 2013