ILS or LOC RWY 27

MOLINE / QUAD CITY INTL (MLI)

LOC/DME I-GEQ	APP CRS	Rwy Idg	10002
110.5	270°	TDZE	581
Chan 42		Apt Elev	590

T A *1800 RVR authorized with the use of FD or AP or HUD to DA. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet, increase LOC-27 and Circling Cat C/D visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 1100, then climbing left turn to 2300 direct MZV VORTAC and hold.

ATIS	QUAD CITY APP CON ★	QUAD CITY TOWER ★	GND CON	CLNC DEL	UNICOM
121.2	125.95 257.8	119.4 (CTAF) L 269.55	121.9 257.8	124.05	122.95

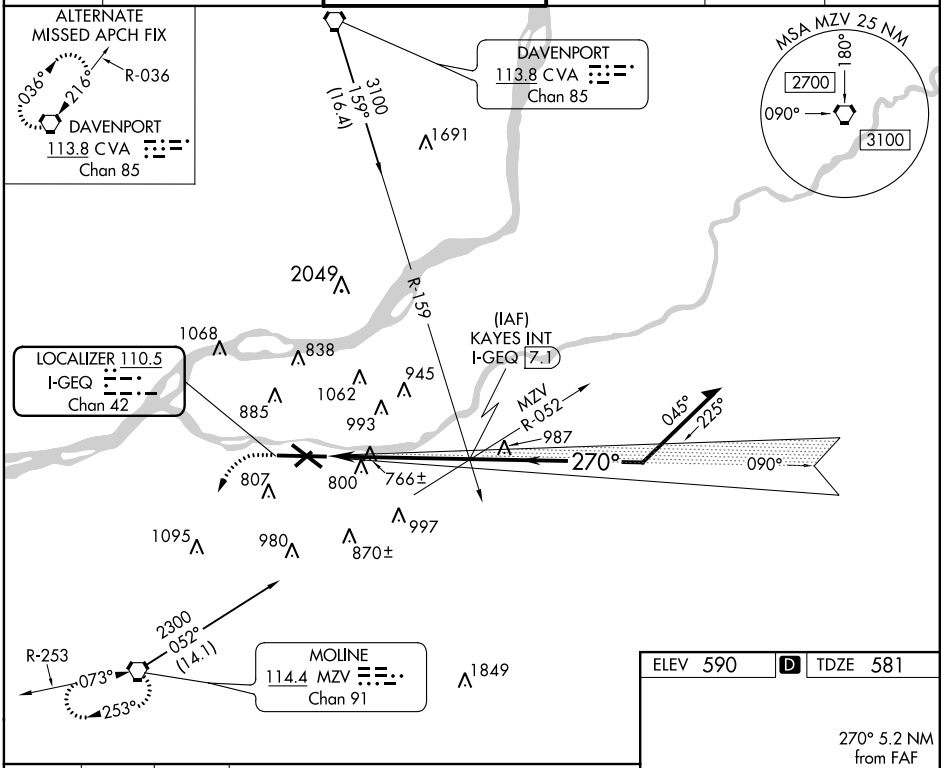

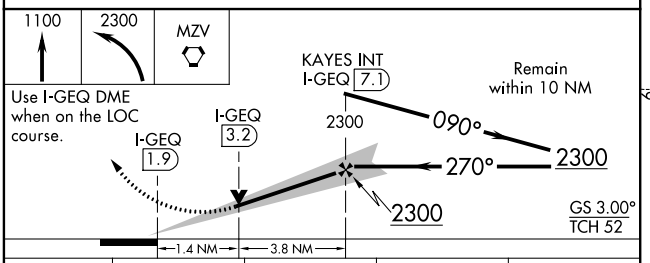



CATEGORY	A	B	C	D
S-ILS 27	*781/24 200 (200-½)			
S-LOC 27	1060/24 479 (500-½)		1060/40 479 (500- ¾)	1060/50 479 (500-1)
CIRCLING	1140-1 550 (600-1)		1140-1½ 550 (600-1½)	1260-2 670 (700-2)

HIRL Rwys 9-27 and 13-31
MIRL Rwy 5-23
REIL Rwys 13 and 31 L

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

EC-3, 07 FEB 2013 to 07 MAR 2013
EC-3, 07 FEB 2013 to 07 MAR 2013