LOC/DME I-MLI	APP CRS	Rwy Idg 10002
110.5 Chan 42	090°	THRE 578
		Apt Elev 590

ILS or LOC RWY 9

MOLINE / QUAD CITY INTL (MLI)

T A # RVR 1800 authorized with the use of FD or AP or HUD to DA. Circling to Rwy 5 NA at night. When local altimeter setting not received, use Davenport altimeter setting: increase DA to 825 feet, increase all MDA 60 feet, and Circling visibility Cats C and D ¼ mile. For inoperative MALSR, increase S-LOC 09 Cats C and D visibility to 1⅜ mile. ZIKRA Minimums: For inoperative MALSR, increase S-LOC Cats C and D visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 1100, then climbing right turn to 2300 direct MZV VORTAC and hold.

ATIS	QUAD CITY APP CON ★	QUAD CITY TOWER ★	GND CON	CLNC DEL	UNICOM
121.2	125.95 257.8	119.4 (CTAF) L 269.55	121.9 257.8	124.05	122.95

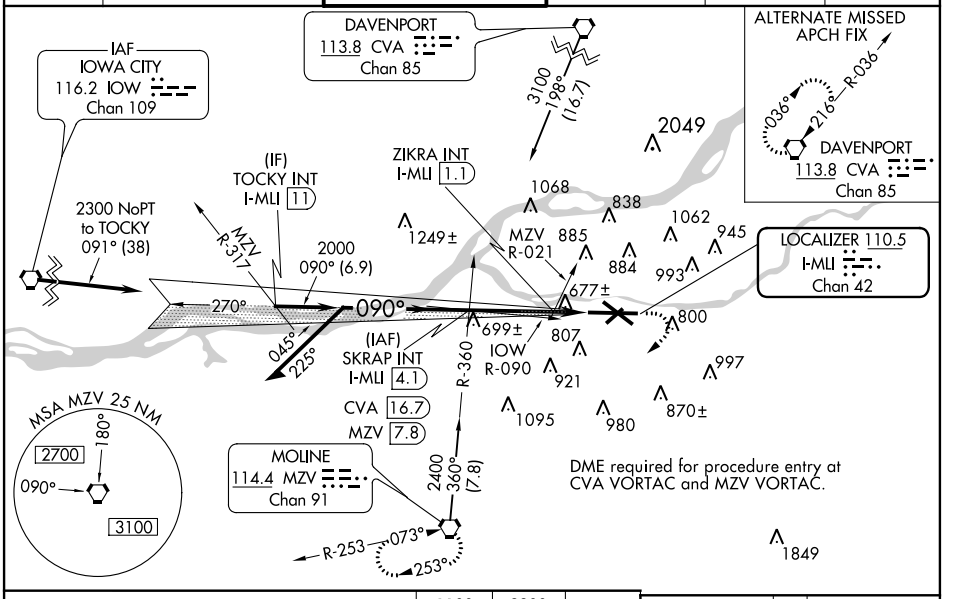

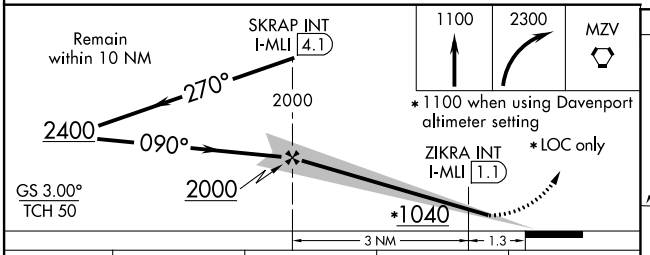

CATEGORY	A	B	C	D
S-ILS 9	#778/24 200 (200-½)			
S-LOC 9	1040/24 462 (500-½)		1040/50 462 (500-1)	
CIRCLING	1140-1 550 (600-1)	1160-1 570 (600-1)	1160-1½ 570 (600-1½)	1260-2 670 (700-2)
ZIKRA MINIMUMS (Dual VOR receivers or DME required)				
S-LOC 9	940/24 362 (400-½)		940/35 362 (400-¾)	
CIRCLING	1140-1 550 (600-1)	1160-1 570 (600-1)	1160-1½ 570 (600-1½)	1260-2 670 (700-2)



MIRL Rwy 5-23
REIL Rwys 13 and 31 L
HIRL Rwys 9-27 and 13-31

FAF to MAP 4.3 NM					
Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

EC-3, 07 FEB 2013 to 07 MAR 2013
EC-3, 07 FEB 2013 to 07 MAR 2013